
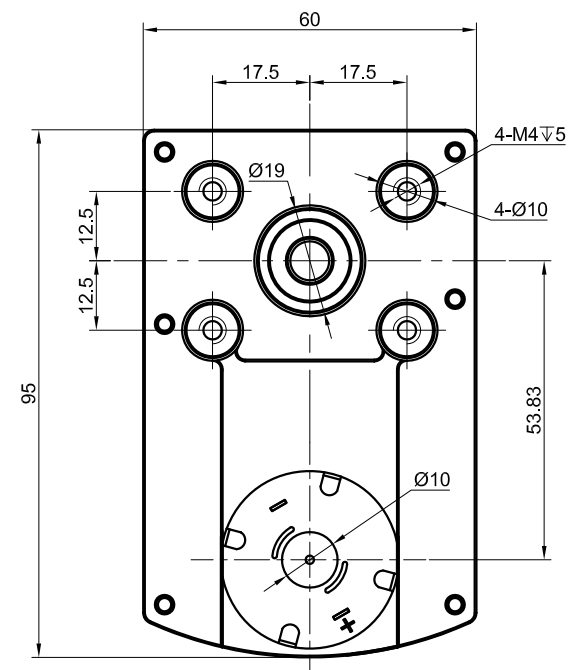
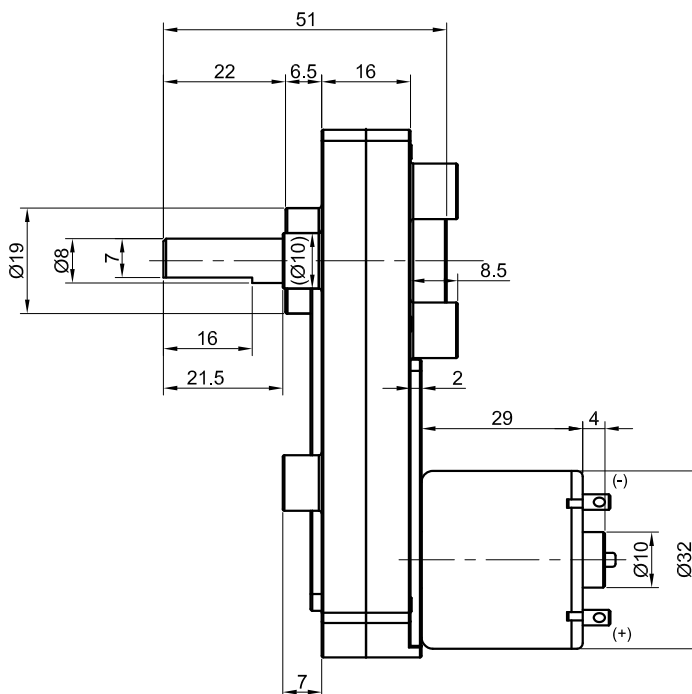


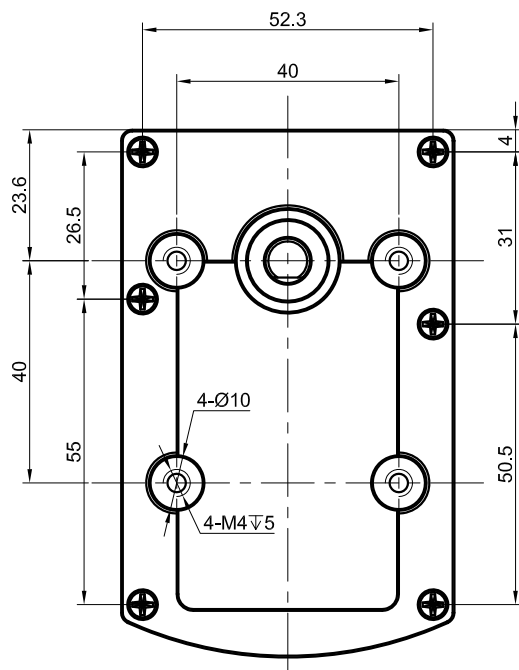

CONNECTION	VALUE	NOTES:			
SPECIFICATION		1.PLEASE CONDUCT THE WELDING WORK IN A SHORT TIME.(RECOMMENDATION:WITH THE SOLDERING IRON TIP AT A TEMPERATURE OF 340~400℃, WITHIN 2 SECONDS. 2.PREVENT GEAR MOTOR FROM BEING SHOCKED OR DROPPING IN MOUNTING PROCESS.IT IS PROHIBITED TO STRIKE AND CRUSH DIRECTLY ON REDUCER OUTPUT SHAFT. 3.IT IS NECESSARY TO BE CAREFUL THAT THE ADHESIVE DOES NOT SPREAD ALONG THE SHAFT AND FLOW INTO THE BEARING. 4.DO NOT TURN A GEARED MOTOR BY ITS OUTPUT SHAFT WHEN,FOR EXAMPLE,ARRANGING ITS POSITION SO AS TO INSTALL IT. 5.USE WITH A LOAD THAT EXCEEDS THE RATED TORQUE WILL BE REDUCE THE LIFETIME OF GEAR MOTOR. 6.CHECK MOTOR RUNNING WHEN IT IS POWER ON BEFORE INSTALLATION AND MAKE SURE PERFORMANCE MEET REQUEST .			
RATED VOLTAGE(V):	12				
NO LOAD CURRENT(mA):	≤100				
NO LOAD SPEED(RPM):	3.8±0.3				
RATED LOAD TORQUE(kgf.cm):	60				
RATED CURRENT(mA):	≤600				
RATED LOAD SPEED(RPM):	3±0.3				
STALL CURRENT(mA):	—				
STALL TORQUE(kgf.cm):	—				
ROTATION DIRECTION	CW/CCW				
		APVD		9.29.2022	DC GEARBOX MOTOR
		CHKD			
		1:1	DRN		FGA-32124500-G1166
		SCALE	SIGNATURE	DATE	