


	REV.	REVISION RECORD	BY	DATE
	0	ORIGIN	LDJ	1.9.2023

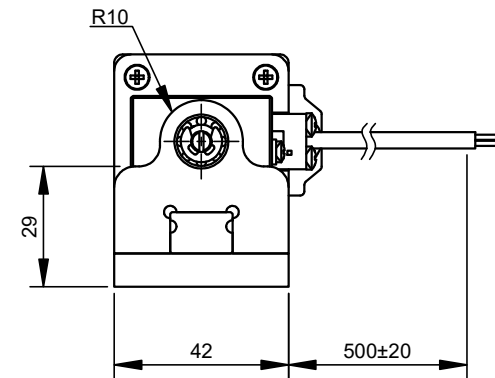

COMMENT:
1. TMBF 6000h OR MORE @ 24V/300RPM
2. INSULATION RESISTANCE
(NORMAL TEMPERATURE AND HUMIDITY): 100 Mohm
3. DIELECTRIC STRENGTH 500VAC FOR 1MIN.
(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)

PHOTOELECTRIC SWITCH SEQUENCE		
PIN NO	BIPOLAR	LEADS
1	+5~24V	BRN
2	GND	BLU
3	SIGNAL LINE	BLK
4	N/A	WHT

MOTOR CONNECTION			
PIN NO	BIPOLAR	LEADS	WINDING
1	A+	RED	
2	A -	RED/WHT	
3	B+	GRN	
4	B -	GRN/WHT	

FULL STEP 2 PHASE-EX.,WHEN FACING MOUNTING END (X)					DIMENSIONS ARE IN MILLIMETERS.		
STEP	A+	B+	A-	B-	↓ ↑ CCW CW	TOLERANCES AS BELOW:	
1	+	+	-	-		DECIMALS	ANGLES
2	-	+	+	-		X ±0.5	±2°
3	-	-	+	+		X.X ±0.25	
4	+	-	-	+		X.XX ±0.13	
						THIRD ANGLE PROJECTION	
THIS DOCUMENT SHALL NOT BE REPRODUCED NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED BY OR DISCLOSED TO OTHERS UNLESS EXPRESSLY AUTHORIZED IN BY WRITING STEPPERONLINE.					SIGNATURE		DATE
					DRN	LDJ	1.9.2023
					APVD	YSX	1.9.2023

STEPPERONLINE®						
LINEAR ACTUATORS						
LMD17S13WF15-120						
REV.	0	SCALE	1:1	DWG NO.	A2664	