


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	HW	6.12.2024

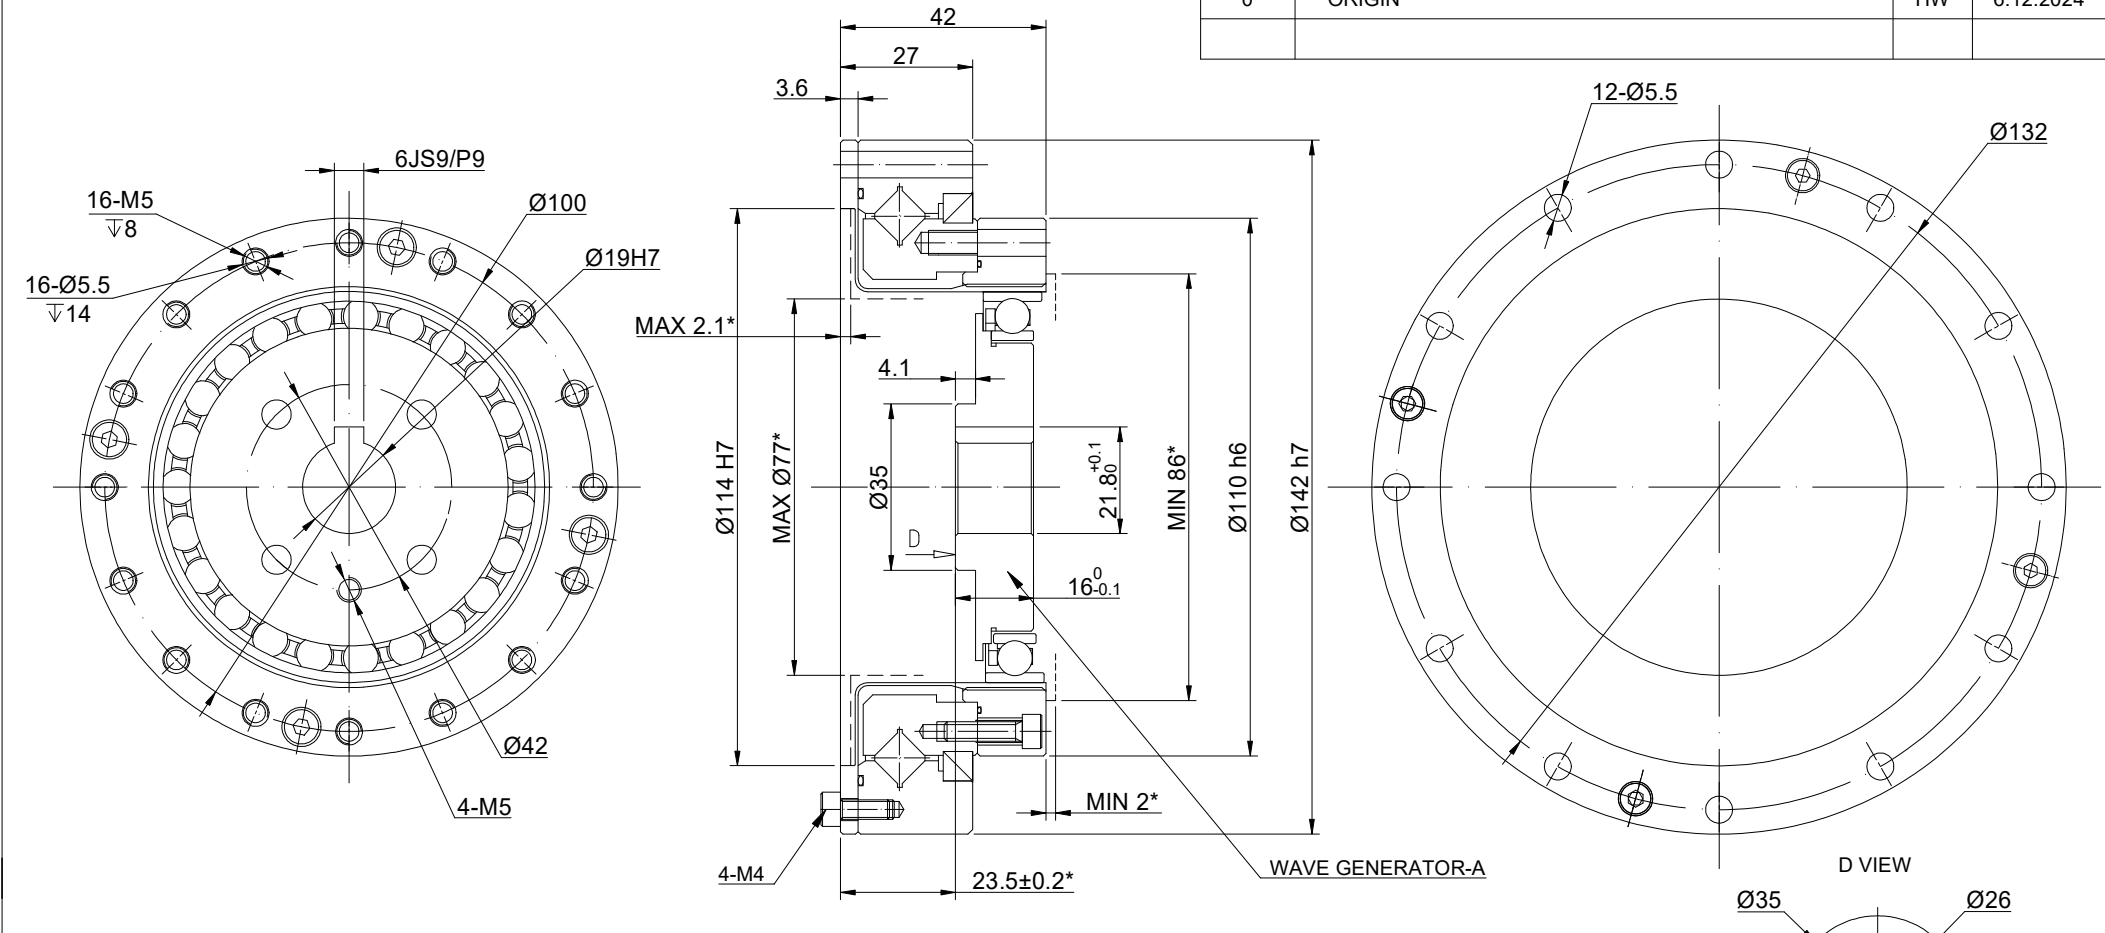

SPECIFICATION	CONNECTION	VALUE
GEAR RATIO		50
BACKLASH@NO-LOAD(arcsec)		<=20
RATED TORQUE(INPUT SPEED 2000RPM)(Nm)[lb-in]		76.00[672.66]
MOMENT PERMISSIBLE TORQUE(Nm)[lb-in]		382.00[3380.99]
PEAK START-STOP TORQUE(Nm)[lb-in]		216.00[1911.76]
MAXIMUM INPUT SPEED ALLOWED(RPM)		4800
AVERAGE INPUT SPEED ALLOWED(RPM)		3500
WEIGHT(kg)		2.54
LIFE(h)		10000
AMBIENT TEMPERATURE		0°C~40°C[32°F~104°F]

DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES AS BELOW:
DECIMALS ANGLES
X ±0.5 ±2°
X.X ±0.25
X.XX ±0.13

THIRD ANGLE PROJECTION	
SIGNATURE	DATE
DRN	HW
APVD	LDJ
	6.12.2024
	6.12.2024

STEPPERONLINE®

HARMONIC REDUCER

HHT-32-50-I-D19

REV.	0	SCALE	2:3	DWG NO.	A3355
------	---	-------	-----	---------	-------