
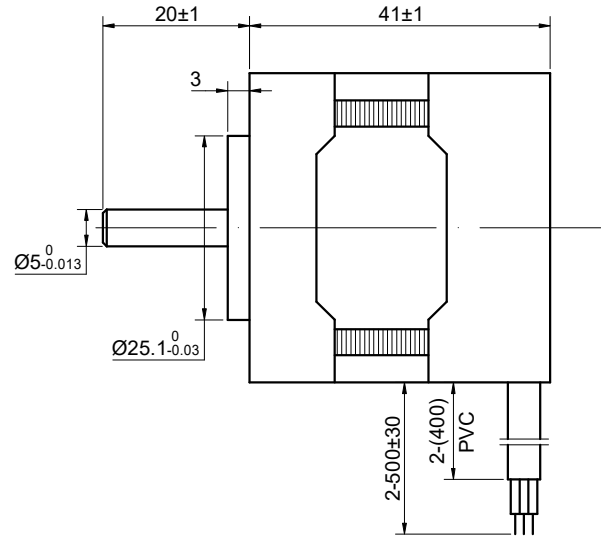


MODEL NO.	42BSB41-24-01	DWG NO.	A3127
-----------	---------------	---------	-------

CUSTOMER'S MODEL: NO MODEL
END COVER COLOR: GRAY


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	ZPJ	4.29.2024

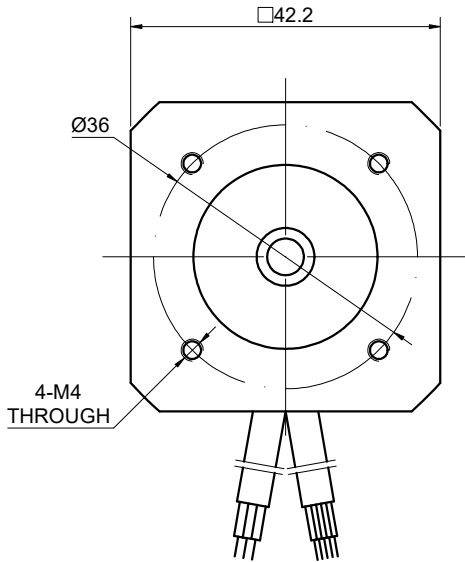

SPECIFICATION	VALUE
NO. of PHASES	3
NO. of POLES	8
RESISTANCE/PHASE(Ohms)@25°C	3.70±10%
INDUCTANCE/PHASE(mH)@1KHz	3.70±20%
RATED VOLTAGE(V)	24
RATED TORQUE(N.m)[lb-in]	0.063[0.56]
RATED POWER(W)	20
RATED SPEED(RPM)	3000±10%
RATED CURRENT(A)	1.20
NO LOAD SPEED(RPM)	4100±10%
WEIGHT(kg)	—
BACK EMF(V/krpm)	4.00±5%
SENSOR	HALL
AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
INSULATION CLASS	B 130°C[266°F]
TEMPERATURE RISE	MAX.80°C

COMMENT: 1.INSULATION RESISTANCE (NORMAL TEMPERATURE AND HUMIDITY): 50 Mohm 2.DIELECTRIC STRENGTH: AC600V CUT OFF CURRENT 2mA FOR 1S	DIMENSIONS ARE IN MILLIMETERS. TOLERANCES AS BELOW: DECIMALS ANGLES X ±0.5 ±2° X.X ±0.25 X.XX ±0.13	
	THIRD ANGLE PROJECTION	

THIS DOCUMENT SHALL NOT BE REPRODUCED NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED BY OR DISCLOSED TO OTHERS UNLESS EXPRESSLY AUTHORIZED IN BY WRITING STEPPERONLINE.	SIGNATURE		DATE
	DRN	ZPJ	4.29.2024
	APVD	HW	4.29.2024

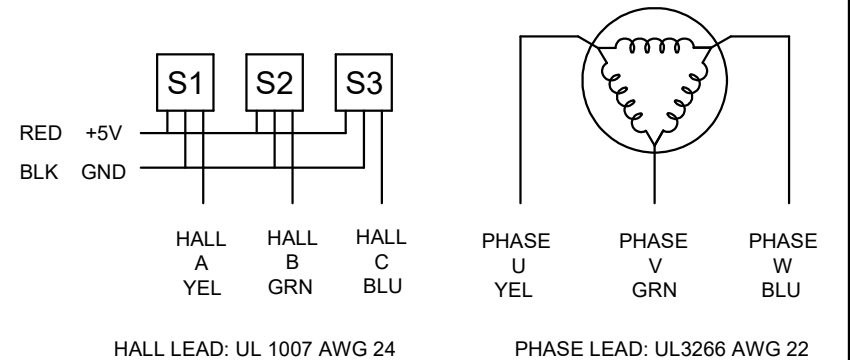

STEPPERONLINE®			
BRUSHLESS DC MOTOR			
42BSB41-24-01			
REV.	0	SCALE	1:1
DWG NO.	A3127		