


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	MYX	10.30.2025

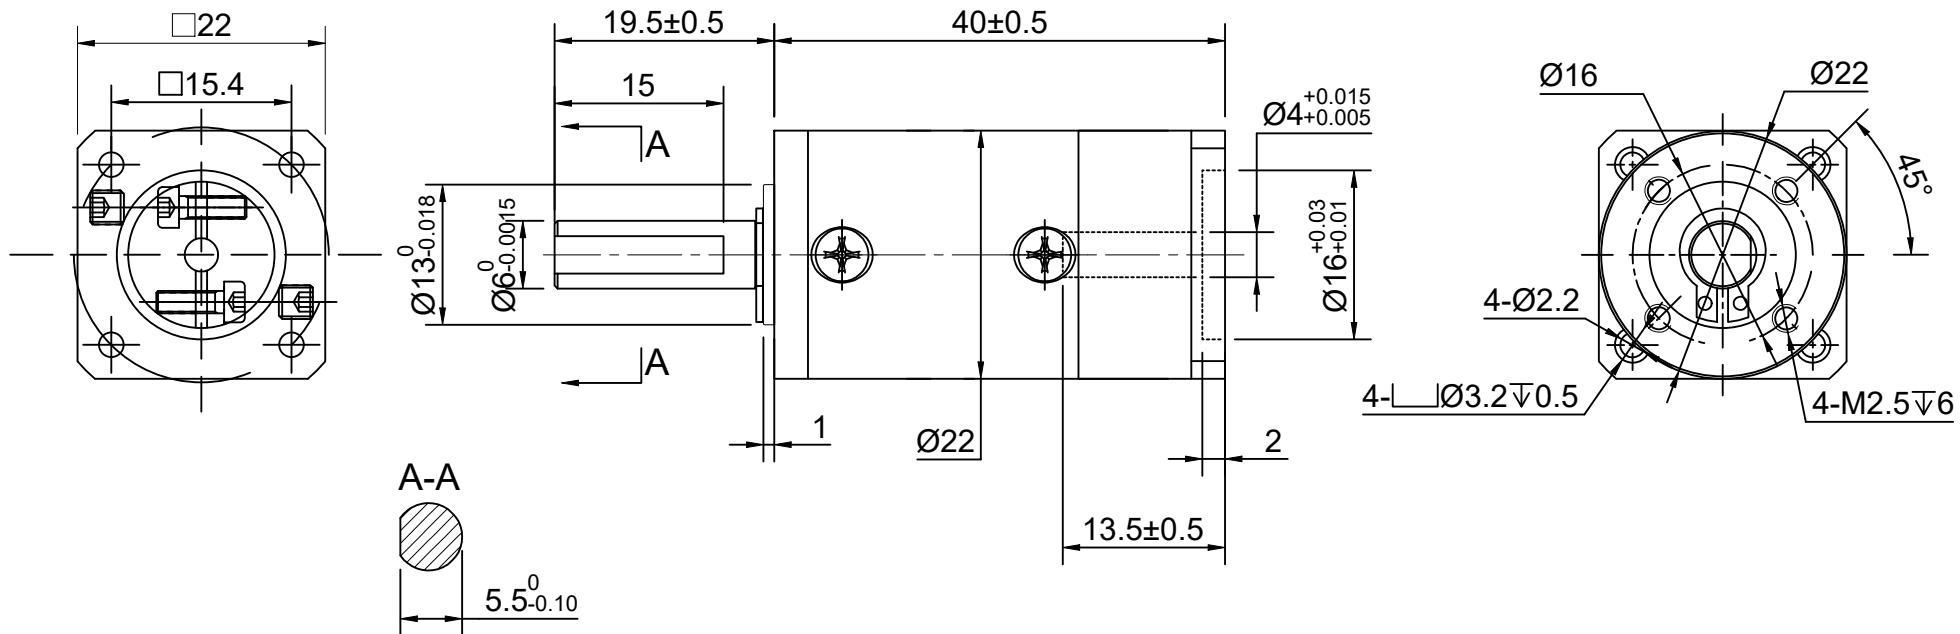

SPECIFICATION	CONNECTION	VALUE
GEAR RATIO		10
EFFICIENCY		96%
BACKLASH@NO-LOAD(arcmin)		<=15
MAX.PERMISSIBLE TORQUE(Nm)[lb-in]		1.00[8.85]
MOMENT PERMISSIBLE TORQUE(Nm)[lb-in]		2.00[17.70]
SHAFT MAXIMUM AXIAL LOAD(N)		100
SHAFT MAXIMUM RADIAL LOAD(N)		300
GEARBOX MATCHING MOTOR'S INPUT SHAFT LENGTH (mm)		6.5~10.5
RATED INPUT SPEED(RPM)		1000
MAX. INPUT SPEED(RPM)		2000
NOISE(dB)		<=55
WATERPROOF RATING		IP54
LIFE(h)		20000
WORKING TEMPERATURE		-20°C~150°C[-4°F~302°F]

DIMENSIONS ARE IN MILLIMETERS.  
TOLERANCES AS BELOW:

DECIMALS	ANGLES
X ±0.5	±2°
X.X ±0.25	
X.XX ±0.13	

THIRD ANGLE PROJECTION

SIGNATURE		DATE
DRN	MYX	10.30.2025
APVD	LJ	10.30.2025

**STEPPERONLINE®**

**PLANETARY GEARBOX**

**EGS8-G10**

REV.	0	SCALE	2:3	DWG NO.	A3791
------	---	-------	-----	---------	-------