

AC/DC 25W Enclosed Switching Power Supply

LM25-23Bxx, LM25-23Bxx-C, LM25-23Bxx-Q Series

MORNSUN®



FEATURES

- 85 - 305VAC or 100 - 430VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Up to 88% efficiency
- No-load power consumption < 0.5W
- High I/O isolation test voltage up to 4000VAC
- Output short circuit, over-current, over-voltage protection
- Over-voltage class III (designed to meet EN61558)
- Operating altitude up to 5000m

LM25-23Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
UL/EN/CCC/IEC/BIS/BS	LM25-23B03	19.8	3.3V/6A	2.85-3.6	78	5000
	LM25-23B05	25	5V/5A	4.5-5.5	81	4000
	LM25-23B12	25.2	12V/2.1A	10.8-13.2	85	3000
	LM25-23B15	25.5	15V/1.7A	13.5-16.5	86	2000
	LM25-23B24	26.4	24V/1.1A	22-27.6	87	1000
	LM25-23B48	27.36	48V/0.57A	42-54	88	500

Note: *Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	305	VAC
	DC input		100	--	430	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	0.6	A
	230VAC		--	--	0.34	
Inrush Current	115VAC	Cold start	--	20	--	
	230VAC		--	40	--	
Leakage Current	277VAC		<0.5mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	3.3V	--	±3	--	%
		5V	--	±2	--	
		12V/15V/24V/48V	--	±1	--	
Line Regulation	Rated load	3.3V/5V	--	±0.5	±1	
		12V/15V/24V/48V	--	±0.5	--	
Load Regulation	0% - 100% load	3.3V/5V	--	±1	±2	
		12V/15V/24V/48V	--	±0.5	±1	
Ripple & Noise*	20MHz bandwidth	3.3V/5V/12V/15V/24V	--	--	100	mV

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.12.02-A/2

Page 1 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

AC/DC 25W Enclosed Switching Power Supply

LM25-23Bxx, LM25-23Bxx-C, LM25-23Bxx-Q Series

MORNSUN®

	(peak-to-peak value)	48V	--	--	120	
Temperature Coefficient			--	±0.03	--	%/℃
Minimum Load			0	--	--	%
Stand-by Power Consumption	230VAC	3.3V/5V/12V/15V/24V	--	--	0.3	W
		48V	--	--	0.5	
Start-up Delay Time			--	300	--	ms
Hold-up Time	115VAC		--	8	--	
	230VAC		--	60	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup, continuous, self-recovery			
Over-current Protection			110%-300% Io, self-recovery			
Over-voltage Protection	3.3V		≤6.75VDC (Output voltage hiccup, self-recovery)			
	5V		≤7.75VDC (Output voltage hiccup, self-recovery)			
	12V		≤16.2VDC (Output voltage hiccup, self-recovery)			
	15V		≤20.25VDC (Output voltage hiccup, self-recovery)			
	24V		≤32.4VDC (Output voltage hiccup, self-recovery)			
	48V		≤60VDC (Output voltage hiccup, self-recovery)			
Note: *The “Tip and barrel method” is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.						

General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <10mA		2000	--	--	VAC
	Input - output			4000	--	--	
	Output - ⊕			1250	--	--	
Insulation Resistance	Input - ⊕	At 500VDC		100	--	--	MΩ
	Input - output			100	--	--	
	Output - ⊕			100	--	--	
Operating Temperature				-30	--	+70	℃
Storage Temperature				-40	--	+85	
Storage Humidity		Non-condensing		--	--	95	%RH
Operating Humidity				20	--	90	
Switching Frequency				--	65	--	kHz
Power Derating	Operating temperature derating	85VAC-100VAC	-30℃ to -25℃	6.0	--	--	% /℃
		3.3V	+40℃ to +70℃	1.33	--	--	
		Others	+50℃ to +70℃	2.0	--	--	
	Input voltage derating	85VAC-100VAC		1.33	--	--	% /VAC
		277VAC-305VAC		0.72	--	--	
Safety Standard				IEC/UL62368-1, GB4943.1, IS13252 (Part1) safety approved & EN62368-1, BS EN 62368-1 (Report)			
Safety Class				CLASS I			
MTBF		MIL-HDBK-217F@25℃		>450,000 h			

Mechanical Specifications

Case Material	Metal (AL5052, SGCC)
Dimension	80.00 x 55.00 x 25.00 mm
Weight	115g (Typ.)
Cooling Method	Free air convection

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.12.02-A/2



Page 2 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
Immunity	ESD	IEC/EN 61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 1\text{KV}$ /line to ground $\pm 2\text{KV}$	perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

Product Characteristic Curve

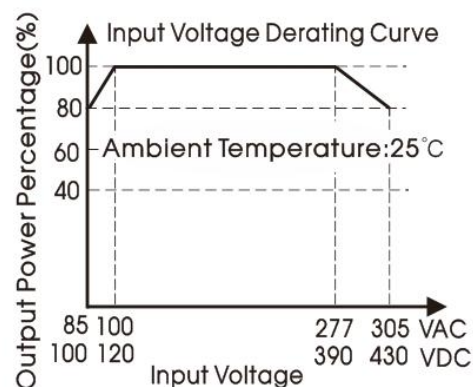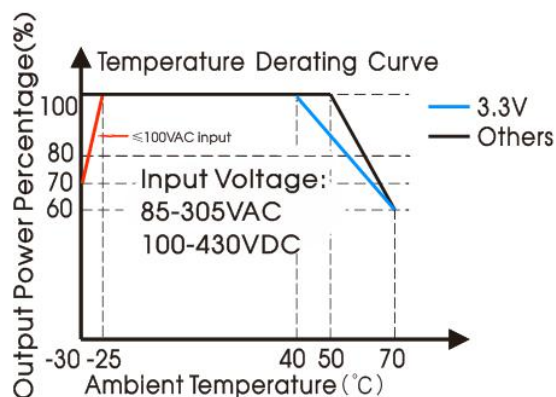

Note: 1. With an AC input between 85-100V/277-305VAC and a DC input between 100-120VDC/390-430VDC, the output power must be derated as per temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

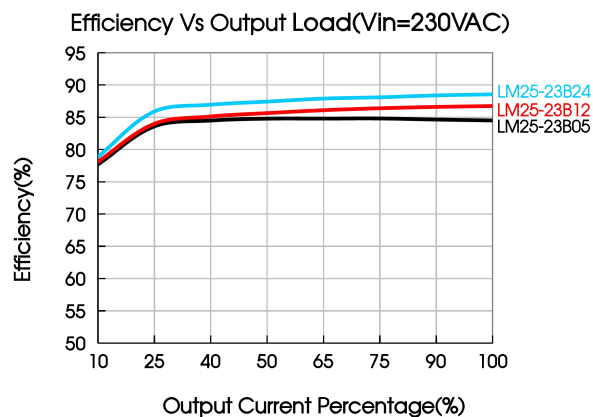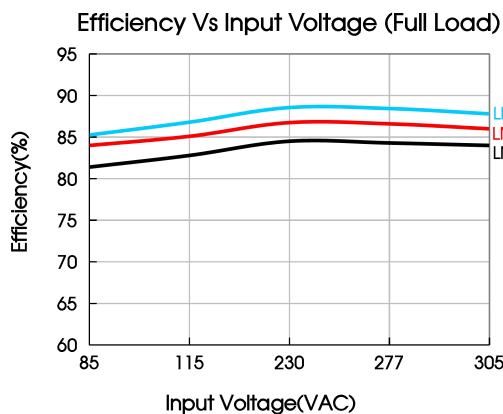


AC/DC 25W Enclosed Switching Power Supply

LM25-23Bxx, LM25-23Bxx-C, LM25-23Bxx-Q Series

MORNSUN®

Dimensions and Recommended Layout

LM25-23Bxx, LM25-23Bxx-Q Series

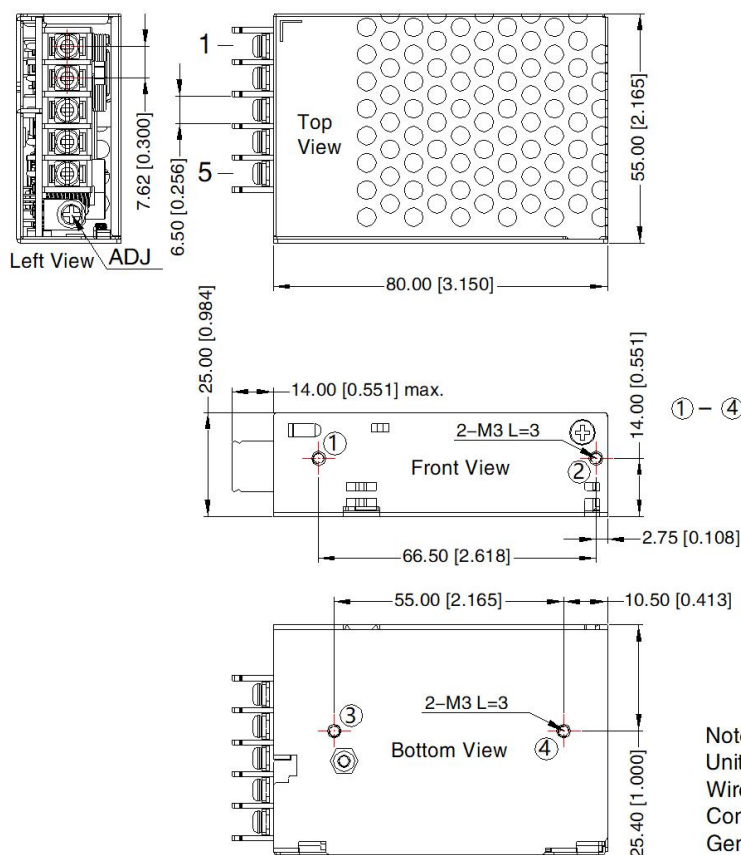


THIRD ANGLE PROJECTION

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⊕
4	-Vo
5	+Vo


① - ④ any position must be connected to the earth(⊕)

Position	Screw Spec.	L(max)	Torque(max)
① - ④	M3	3mm	0.4N·m

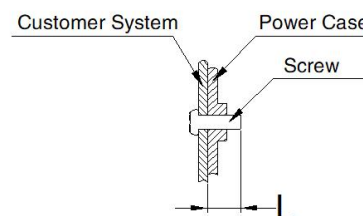

Note:
Unit: mm[inch]
Wire range: 22-12AWG
Connector tightening torque: M3, 0.4N·m
General tolerances: $\pm 1.00[\pm 0.039]$

LM25-23Bxx-C Series

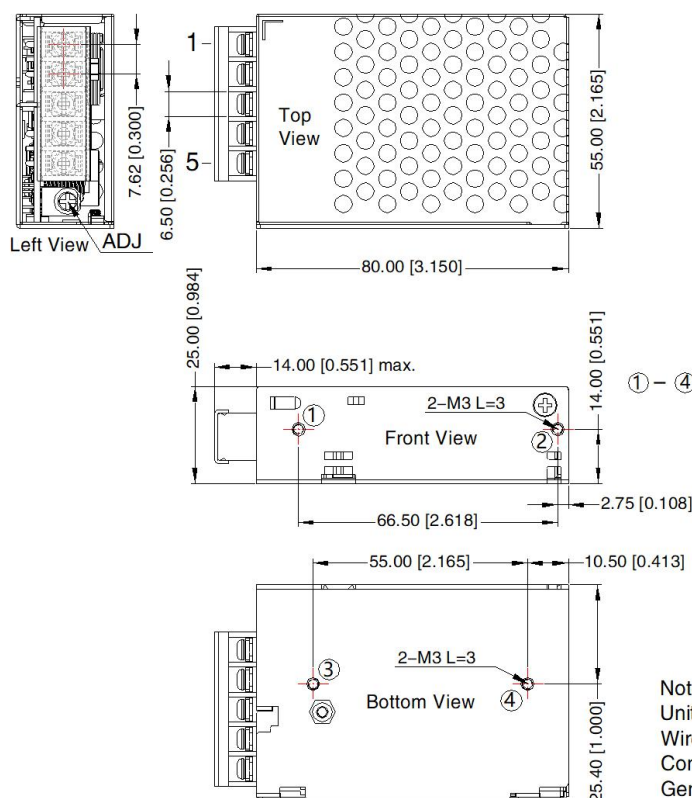


THIRD ANGLE PROJECTION

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⊕
4	-Vo
5	+Vo

① - ④ any position must be connected to the earth(⊕)

Position	Screw Spec.	L(max)	Torque(max)
① - ④	M3	3mm	0.4N·m



Note:
Unit: mm[inch]
Wire range: 22-12AWG
Connector tightening torque: M3, 0.4N·m
General tolerances: $\pm 1.00[\pm 0.039]$

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.12.02-A/2

Page 4 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220145;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
3. The ambient temperature derating of $3.5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to the earth of system when the terminal equipment in operating;
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.
10. The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com