

AC/DC 35W Enclosed Switching Power Supply

LM35-23Bxx, LM35-23Bxx-C, LM35-23Bxx-Q Series

MORNSUN®



FEATURES

- Universal 85 - 305VAC or 120 - 430VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30℃ to +70℃
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- Safety according to IEC/EN/UL62368, EN60335, EN61558, GB4943
- Over-voltage class III (designed to meet EN61558)
- Operating altitude up to 5000m



RoHS



LM35-23Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, EN60335, EN61558, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
UL/CE/CB/CCC	LM35-23B05	35	5V/7A	4.5-5.5	86	8000
	LM35-23B12	36	12V/3A	10.2-13.8	88	1500
	LM35-23B15		15V/2.4A	13.5-18	86	1000
	LM35-23B24		24V/1.5A	21.6-28.8	87	750

Note: *Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input		85	--	305	VAC	
	DC input		120	--	430	VDC	
Input Voltage Frequency			47	--	63	Hz	
Input Current	115VAC		--	--	0.8	A	
	230VAC		--	--	0.6		
Inrush Current	115VAC	Cold start	--	30	--		
	230VAC		--	50	--		
Leakage Current	277VAC		<0.75mA				
Hot Plug			Unavailable				

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/15V/24V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0% - 100% load	5V	--	±1	--	
		12V/15V/24V	--	±0.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	--	80	--	mV
		12V/15V	--	120	--	
		24V	--	150	--	

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.05.17 -A/3

Page 1 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

AC/DC 35W Enclosed Switching Power Supply

LM35-23Bxx, LM35-23Bxx-C, LM35-23Bxx-Q Series

MORNSUN®

Temperature Coefficient		--	±0.03	--	%/℃
Minimum Load		0	--	--	%
Stand-by Power Consumption		--	--	0.3	W
Hold-up Time	115VAC	8	--	--	ms
	230VAC	30	--	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup or turn off, continuous, self-recovery		
Over-current Protection	230VAC, Rated load	Normal temperature, High temperature	110% - 200% Io, self-recovery		
		Low temperature	≥110% Io, self-recovery		
Over-voltage Protection	5V	≤6.3VDC (Hiccup, self-recovery)			
	12V	≤16.2VDC (Hiccup, self-recovery)			
	15V	≤21.75VDC (Hiccup, self-recovery)			
	24V	≤33.6VDC (Hiccup, self-recovery)			
Note: *The “Tip and barrel method” is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.					

General Specifications

Item		Operating Conditions			Min.	Typ.	Max.	Unit
Isolation Test	Input - ⊕	Electric strength test for 1min., leakage current <10mA			2000	--	--	VAC
	Input - output				4000	--	--	
	Output - ⊕				1250	--	--	
Insulation Resistance	Input - ⊕	At 500VDC			100	--	--	M Ω
	Input - output				100	--	--	
	Output - ⊕				100	--	--	
Operating Temperature					-30	--	+70	°C
Storage Temperature					-40	--	+85	
Operating Humidity		Non-condensing			20	--	90	%RH
Storage Humidity					--	--	95	
Switching Frequency					--	65	--	kHz
Power Derating		Operating temperature derating	-30°C to -25°C	85VAC-100VAC	5	--	--	% / °C
			+50°C to +70°C		2	--	--	
		Input voltage derating	85VAC-100VAC		1.33	--	--	% / VAC
			277VAC-305VAC		0.71	--	--	
Safety Standard					Meet IEC/EN/UL62368/EN60335/EN61558/GB4943			
Safety Certification					IEC/EN/UL62368/EN60335/EN61558/GB4943			
Safety Class					CLASS I			
MTBF		MIL-HDBK-217F@25°C			>300,000 h			

Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	99.00 x 82.00 x 30.00 mm
Weight	170g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B		
	RE	CISPR32/EN55032 CLASS B		
	Harmonic current	IEC/EN61000-3-2 CLASS A		
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6KV/Air ±8KV	Perf. Criteria A

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.



2021.05.17 -A/3

Page 2 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation



RS	IEC/EN 61000-4-3 10V/m	perf. Criteria A
EFT	IEC/EN 61000-4-4 ±2KV	perf. Criteria A
Surge	IEC/EN 61000-4-5 line to line ±2KV/line to ground ±4KV	perf. Criteria A
CS	IEC/EN61000-4-6 10 Vr.m.s	perf. Criteria A
Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11 0%, 70%	perf. Criteria B

Product Characteristic Curve

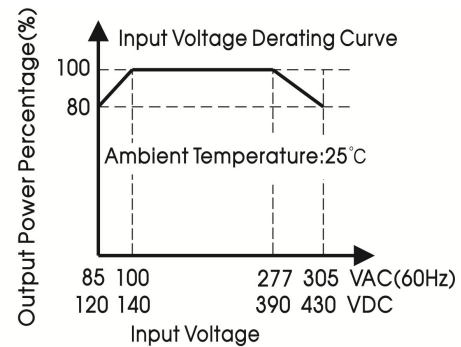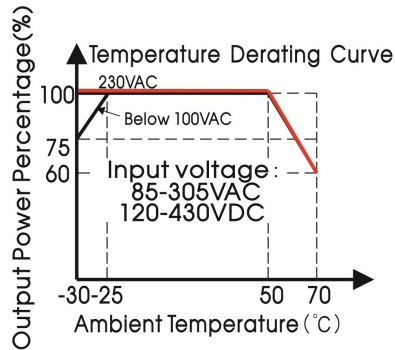




Note: 1. With an AC input voltage between 85 -100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

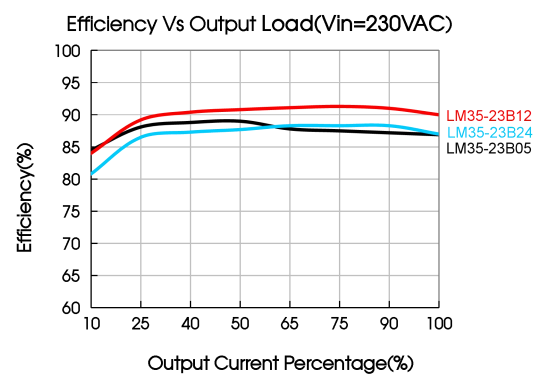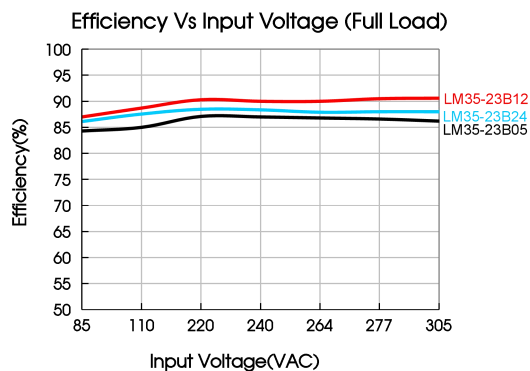


Dimensions and Recommended Layout

LM35-23Bxx, LM35-23Bxx-Q Series

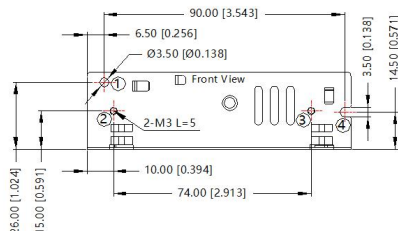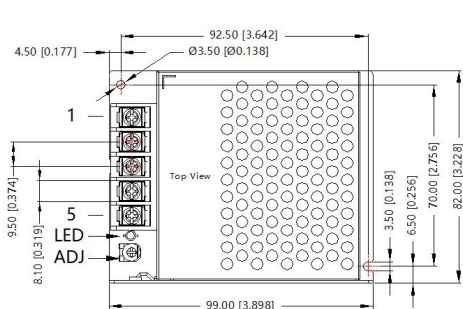

Note:
Unit: mm[inch]
Wire range: 22-12AWG
Connector tightening torque: M3.5, 0.8N·m
General tolerances: $\pm 1.00 [\pm 0.039]$


THIRD ANGLE PROJECTION






Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⏏
4	-Vo
5	+Vo

①-⑧ any position must be connected to the earth(⏏)

Position	Screw Spec.	L(max)	Torque(max)
② - ③	M3	5mm	0.4N·m
⑥ - ⑦	M3	3mm	0.4N·m




LM35-23Bxx-C Series

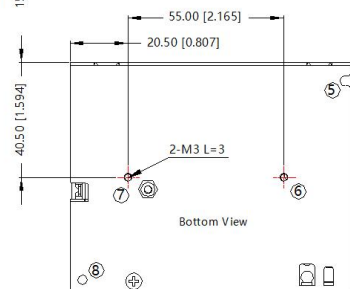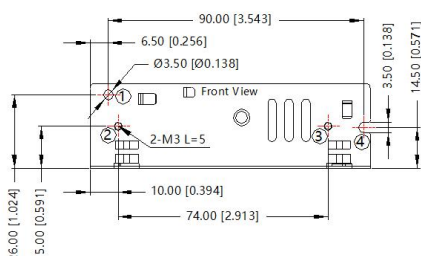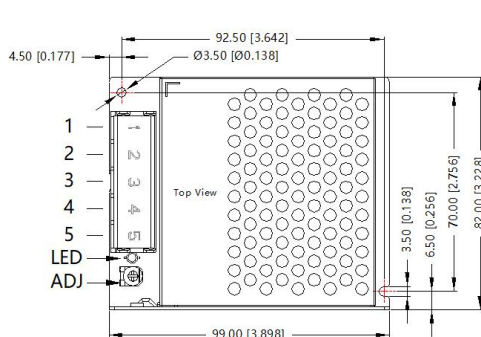

Note:
Unit: mm[inch]
Wire range: 22-12AWG
Connector tightening torque: M3.5, 0.8N·m
General tolerances: $\pm 1.00 [\pm 0.039]$


THIRD ANGLE PROJECTION



Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⏏
4	-Vo
5	+Vo

①-⑧ any position must be connected to the earth(⏏)

Position	Screw Spec.	L(max)	Torque(max)
② - ③	M3	5mm	0.4N·m
⑥ - ⑦	M3	3mm	0.4N·m

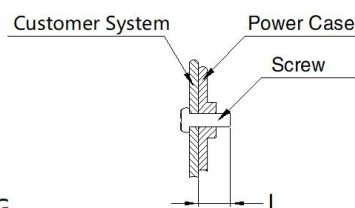

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220118;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
3. The room temperature derating of $5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to the earth ($\oplus$) of system when the terminal equipment in operating;
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com