



### FEATURES

- AC input range: 176 - 264VAC
- DC input range: 240 - 370VDC
- Ultra low standby power consumption: < 0.75W @230VAC
- Operating ambient temperature range: - 30°C to +70°C
- High efficiency, high reliability
- LED indicator for power on
- Output short circuit, over-current, over-voltage, over-temperature protection
- Operating altitude up to 5000m
- Safety according to EN60335, EN61558



LM200-12Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These power supply offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, UL/EN/IEC62368, EN60335, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

### Selection Guide

Certification	Part No.*	Output Power(W)		Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)
		Steady state	transient**				
UL/EN/IEC/ CQC/BIS	LM200-12B05	150	200	5V/30A	4.5-5.5	87	10000
	LM200-12B12	204	--	12V/17A	10.2-13.8	87.5	4000
	LM200-12B15	210	--	15V/14A	13.5-18	88	3300
	LM200-12B24	211.2	--	24V/8.8A	21.6-28.8	88.5	1500
	LM200-12B36	212.4	--	36V/5.9A	32.4-39.6	89	1500
	LM200-12B48	211.2	--	48V/4.4A	43.2-52.8	89.5	470

Note: 1.\*Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating;  
 2.\*\*Hold-up time 1min (Typ.);  
 3.The product picture is for reference only. For details, please refer to the actual product.

### Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit			
Input Voltage Range (by switch)	AC input	176	--	264	VAC			
	DC input	240	--	370	VDC			
Input Voltage Frequency		47	--	53	Hz			
Input Current	230VAC	--	2.2	3	A			
Inrush Current	230VAC					Cold start	--	60
Hot Plug					Unavailable			

### Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	Full load range	5V	--	±3.0	--	%
		12V	--	±1.5	--	
		15V/24V/36V/48V	--	±1.0	--	
Line Regulation	Rated load	--	±0.5	--		
Load Regulation	0% - 100% load	5V	--	±2.0	--	
		12V	--	±1.0	--	

# AC/DC 200W Enclosed Switching Power Supply

## LM200-12Bxx, LM200-12Bxx-Q, LM200-12Bxx-C Series

# MORNSUN®

		15V/24V/36V/48V	--	±0.5	--	
Output Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V/12V/15V/24V	--	150	--	mV
		36V/48V	--	200	--	
Temperature Coefficient			--	--	±0.03	%/°C
Minimum Load			0	--	--	%
Stand-by Power Consumption	230VAC, 25°C		--	--	0.75	W
Hold-up Time	230VAC		16	--	--	ms
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup, continuous, self-recover			
Over-current Protection			110% - 185% I <sub>o</sub> , self-recover			
Over-voltage Protection	5V		≤8VDC			Output voltage turn off, re-power on for recover
	12V		≤18VDC			
	15V		≤22VDC			
	24V		≤33.6VDC			
	36V		≤46.8VDC			
	48V		≤60VDC			
Over-temperature Protection			Output voltage turn off, re-power on for recover			
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47μF electrolytic capacitor and 0.1μF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.						

## General Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <5mA		2000	--	--	VAC
	Input - output			3000	--	--	
	Output - ⊕			500	--	--	
Insulation Resistance	Input - ⊕	At 500VDC		100	--	--	MΩ
	Input - output			100	--	--	
	Output - ⊕			100	--	--	
Operating Temperature				-30	--	+70	°C
Storage Temperature				-40	--	+85	
Storage Humidity	Non-condensing			10	--	95	%RH
Operating Humidity				20	--	90	
Switching Frequency				--	65	--	kHz
Power Derating	Operating temperature derating	5V output	+40°C to +70°C	1.66	--	--	%/°C
		Other output	+50°C to +70°C	2.5	--	--	
	Input voltage derating	176VAC - 264VAC	0	--	--	%/VAC	
Safety Standard				UL/IEC62368-1, IS13252 (Part1), GB4943.1 safety approved & EN62368-1, BS EN62368-1 (Report) Design refer to EN60335-1, EN61558-1			
Safety Class				CLASS I			
MTBF	MIL-HDBK-217F@25°C			>300,000 h			

## Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	179.00 x 99.00 x 30.00mm
Weight	520g (Typ.)
Cooling Method	Free air convection

# MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2023.06.12-B/1

Page 2 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

## Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A	
	RE	CISPR32/EN55032	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	Perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$ /line to ground $\pm 4\text{KV}$	Perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
	Voltage dips, short interruptions and voltage variations	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria B

**Remark:**

- One magnetic bead(nickel-zinc ferrite ) should be coupled with the output load line during CE/RE testing;
- This power supply does not meet the harmonic current requirements specified in EN61000-3-2.



Please do not use this power supply under the following conditions:

- The terminal equipment is used in the European Union.
- Supporting terminals are connected to a public power grid with 220VAC or a higher voltage that comply with the requirements of EN61000-3-2.
- The power supply is installed in terminal equipment with average or continuous input power greater than 75W.
- The power supply belong to a part of lighting system.



Exception: The power supply used in the following terminal equipment does not need to meet EN61000-3-2.

- Professional equipment with a total rated input power greater than 1000W.
- Symmetrically controlled heating element with a rated power less than or equal to 200W.
- If no harmonic current is required or customers can solve harmonic current problems by themselves, this product can be used.

## Product Characteristic Curve

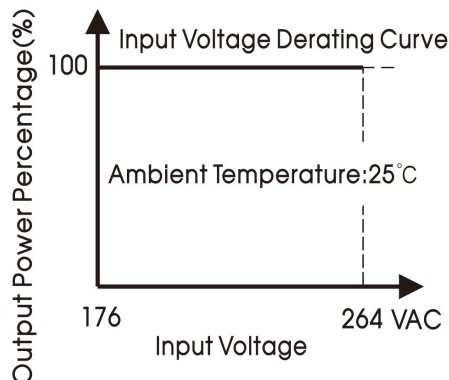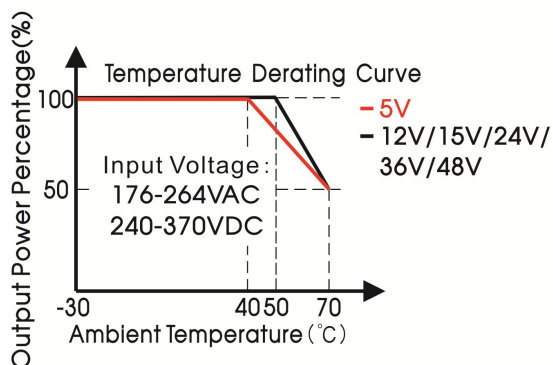


Note: This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

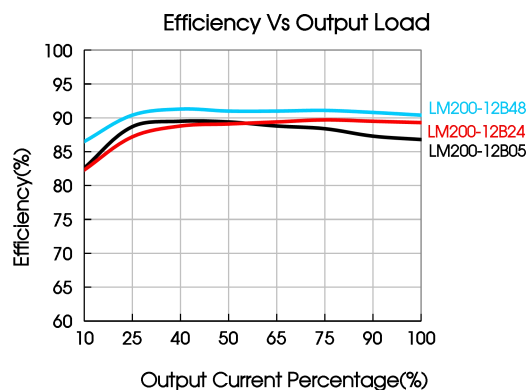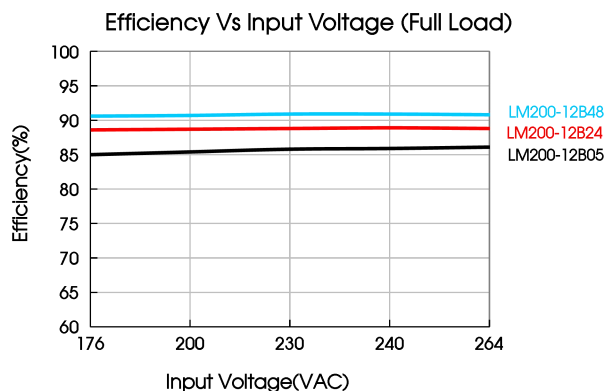


Dimensions and Recommended Layout

LM200-12Bxx, LM200-12Bxx-Q Series

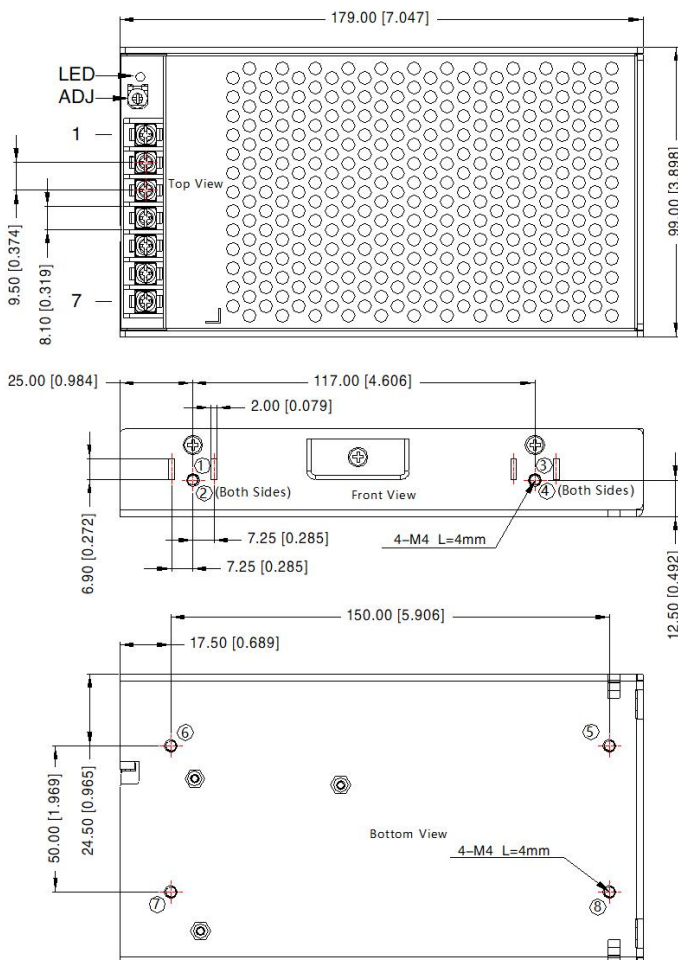


THIRD ANGLE PROJECTION




Pin-Out	
Pin	Function
1	+Vo
2	+Vo
3	-Vo
4	-Vo
5	⊕
6	AC(N)
7	AC(L)

Position	Screw Spec.	L(max)	Torque(max)
① - ⑧	M4	4mm	0.9N·m

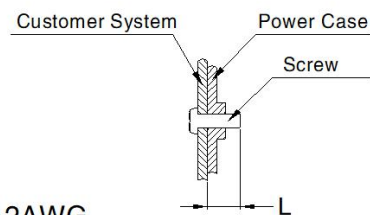

Note:  
Unit: mm[inch]  
Wire range: 22-12AWG  
Connector tightening torque: M3.5, 0.8N·m Max  
General tolerances:  $\pm 1.00[\pm 0.039]$   
① - ⑧ any position must be connected to PE

### LM200-12Bxx-C Series

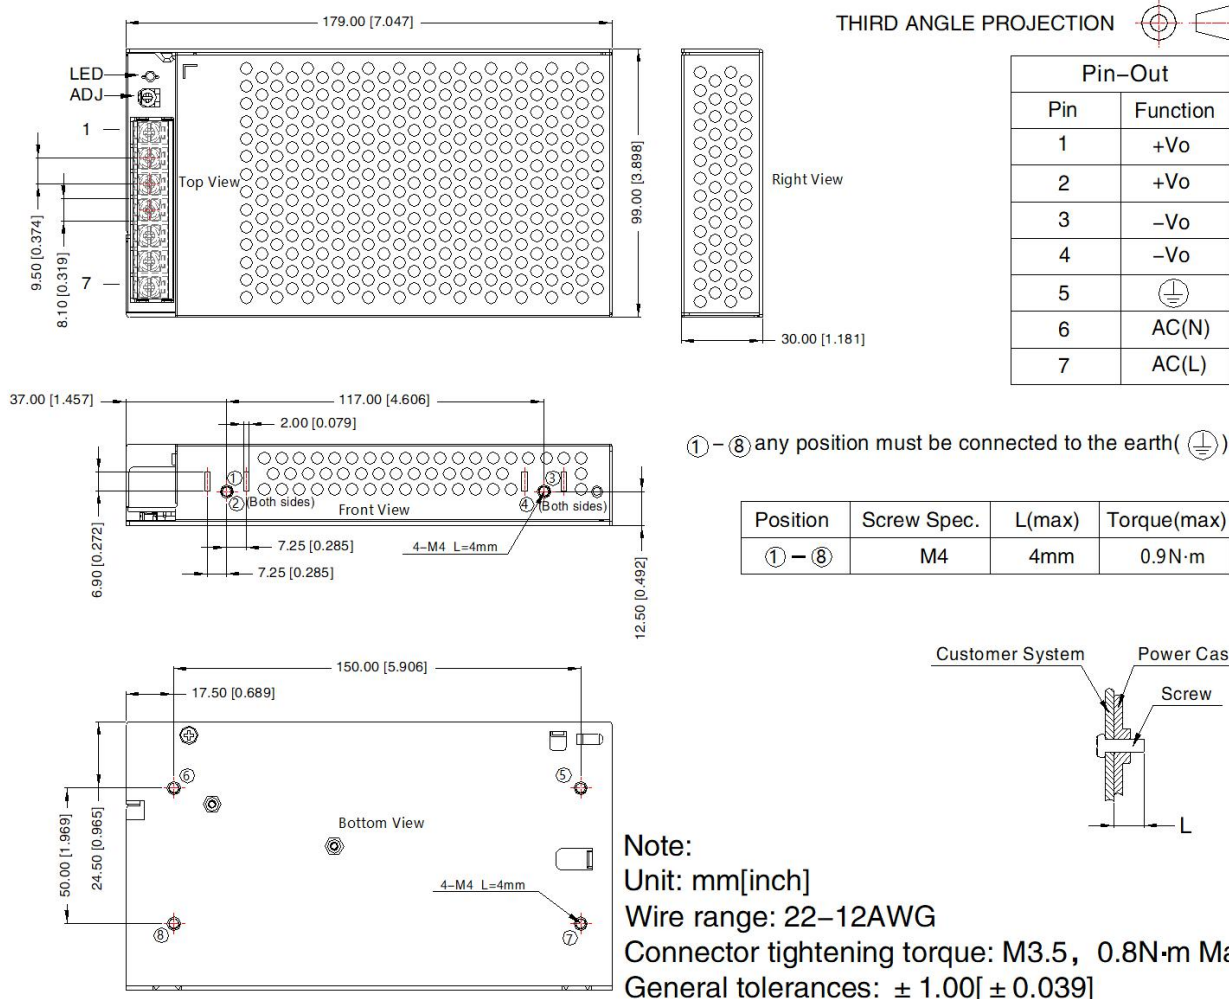

**Note:**

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220136;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
- The ambient temperature derating of  $5^{\circ}\text{C}/1000\text{m}$  is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE(⊕)of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)