



FEATURES

- Universal 176 - 264VAC or 240 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +85°C
- Low standby power consumption: <0.75W@230VAC
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- Operating altitude up to 5000m
- Over-voltage class III (designed to meet EN62477)
- Safety according to IEC/UL/EN/BS EN62368, EN60335, EN61558, EN62477, GB4943

LM350-22BxxR2 series is the ultra-small Mornsun second-generation new industrial standard enclosed power supply, which has innovated the industrial power supply standard from the aspect of dimension, performance, technology and structure. It features general AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN/BS EN62368, EN60335, EN62477, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, etc.

Selection Guide

Certification	Part No.*	Output Power (W)*	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF)Max.
(EN/CQC) Pending	LM350-22B12R2	348.0	12.0V/29.0A	11.4 - 13.8	85.5	4000
	LM350-22B15R2	349.5	15.0V/23.3A	14.25 - 17.25	86.0	3300
	LM350-22B24R2	350.4	24.0V/14.6A	22.8 - 27.6	88.0	1500
	LM350-22B36R2	349.2	36.0V/9.7A	32.4 - 39.6	88.5	1500
	LM350-22B48R2	350.4	48.0V/7.3A	43.2 - 52.8	89.0	470
	LM350-22B54R2	351.0	54.0V/6.5A	51.3 - 56.7	88.5	330

Note:
 1.*Use suffix "C" for terminal with protective cover, suffix "Q" for bottom conformal coating and "QQ" for both sides conformal coating;
 2.*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	176	--	264	VAC
	DC Input	240	--	370	
Input Frequency	AC Input	47	--	53	Hz
Input Current	230VAC	--	3.4	4.0	A
Inrush Current	230VAC	--	80	--	
Start-up Delay Time	230VAC	--	1000	3000	ms
Hot Plug		Unavailable			

Output Specifications*

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	Full load range	12V	--	1.5	--	%
		15V/24V/36V/48V/54V	--	1.0	--	
Line Regulation	Rated load	--	0.5	--		
Load Regulation	0% - 100% load	12V/15V	--	1.0	--	
		24V/36V/48V/54V	--	0.5	--	
Minimum Load		0	--	--		
Stand-by Power Consumption	25°C, 230VAC	--	--	0.75	W	

AC/DC 350W Enclosed Switching Power Supply

LM350-22BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series

MORNSUN®

Ripple & Noise*	20MHz bandwidth (peak-peak value)	12V/15V	--	180	--	mV
		24V/36V/48V	--	240	--	
		54V	--	300	--	
Temperature Coefficient	230VAC, 0 - 50°C	--	--	0.03	--	%/°C
Output Rise Time	230VAC, rated load	--	50	--	--	ms
Hold-up Time	230VAC, rated load	--	16	--	--	
Short Circuit Protection*		Hiccup, continuous, self-recover				
Over-current Protection		130% - 220% Io, self-recover				
Over-voltage Protection	12V	≤16.2V	Hiccup, self-recover			
	15V	≤21.0V	Hiccup, self-recover			
	24V	≤33.6V	Hiccup, self-recover or output voltage clamp			
	36V	≤46.8V	Hiccup, self-recover or output voltage clamp			
	48V	≤63.0V	Hiccup, self-recover or output voltage clamp			
	54V	≤70.0V	Hiccup, self-recover or output voltage clamp			
Over-temperature Protection		Hiccup, self-recover				

Note:

- *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to enclosed Switching Power Supply Application Notes for specific information;
- *Recover time <5s after the short circuit disappear;
- *If not specified, all specifications are measured at input 230VAC, full load and ambient temperature of 25°C.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation Test	Input - output	Electric strength test for 1min., leakage current <5mA	4000	--	--	VAC
	Input - ⊕	Electric strength test for 1min., leakage current <3mA	2000	--	--	
	Output - ⊕		500	--	--	
Insulation Resistance	Input - output	Environment temperature: 25±5°C Relative humidity: <95%RH, non-condensing Testing voltage: 500VDC	100	--	--	MΩ
	Input - ⊕		100	--	--	
	Output - ⊕		100	--	--	
Operating Temperature		-40	--	+85	°C	
Storage Temperature		-40	--	+85		
Storage Humidity	Non-condensing	10	--	95	%RH	
Operating Humidity		20	--	90		
Switching Frequency		--	65	--	KHz	
Power Derating	Operating temperature derating	-40°C to -30°C	2.0	--	--	% / °C
		+50°C to +85°C	2.0	--	--	
Leakage Current	264VAC	Touch leakage current	<0.5mA			
		Earth leakage current	<2.0mA			
Safety Standards		Design refer to IEC/UL/EN/BS EN62368-1, EN61558-1, EN60335-1, EN62477-1, GB4943.1				
Safety Class		CLASS I				
MTBF	MIL-HDBK-217F@25°C	> 300,000 h				
Warranty		3 years				

General Specifications

Case Material	Metal (AL5052, SGCC)
Dimensions	179.00 x 106.00 x 30.00mm
Weight	540g (Typ.)
Cooling Method	Forced air cooling

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.



2022.08.25-A/0 Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32 EN55032	CLASS A	
	RE	CISPR32 EN55032	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±4KV	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV	perf. Criteria A
	PFMF	IEC/EN61000-4-8	30A/m	perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dips	IEC/EN61000-4-11	0%, 70%	perf. Criteria A
	Voltage interruption	IEC/EN61000-4-11	0% of 230Vac, 0Vac, 5000ms	perf. Criteria B



Product Characteristic Curve

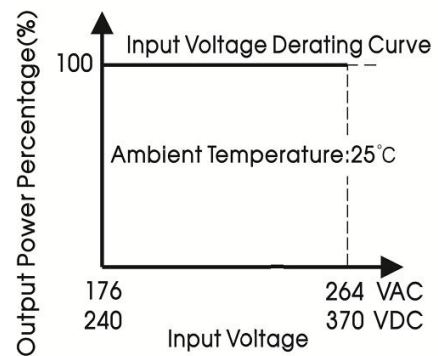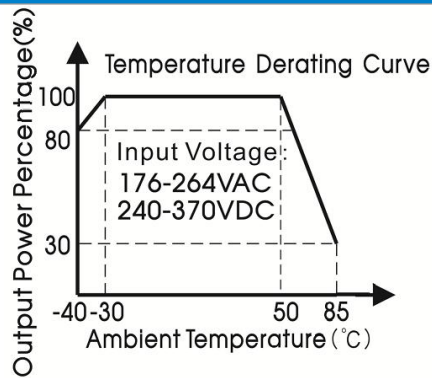

Notes: This product is suitable for forced air cooling environment, if used in a closed environment, please consult our FAE.

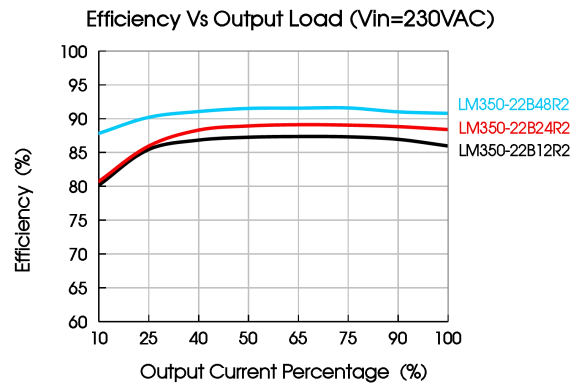
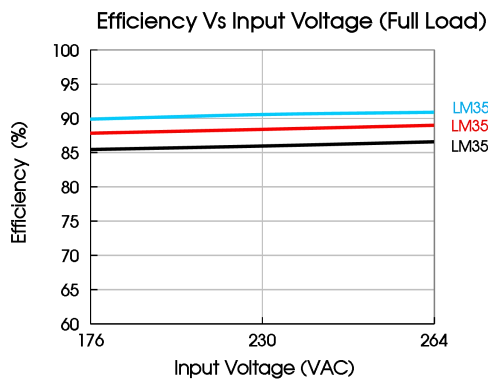


Dimensions and Recommended Layout

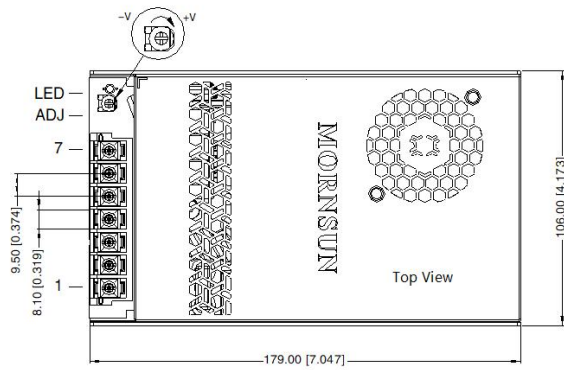


THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	
4	-Vo
5	-Vo
6	+Vo
7	+Vo

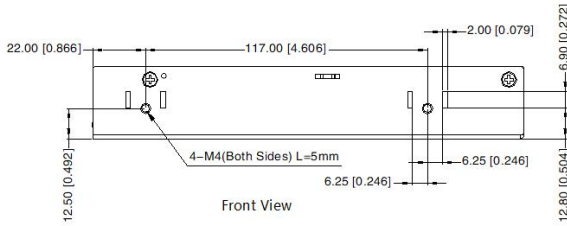

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M4	3mm	0.9N · m

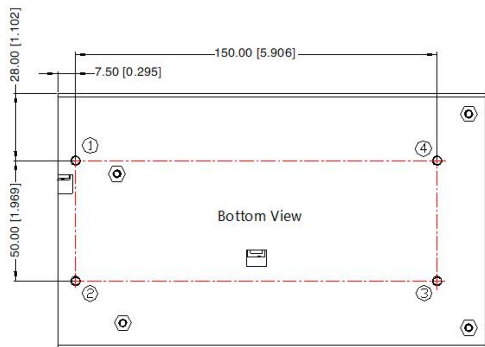

Note:
Unit: mm[inch]
ADJ: Output adjustable resistor
Wire range: Input: 20-10AWG(16-10AWG for pin3)
Output: 12V, 15V: 14-10AWG
24V, 36V: 18-10AWG
48V, 54V: 20-10AWG
Pin1-7 connector tightening torque: M3.5, 0.8N · m max.
General tolerances: ± 1.00[± 0.039]

- Note:
- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220303;
 - Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity <75% RH with nominal input voltage and rated output load;
 - The room temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
 - All index testing methods in this datasheet are based on our company corporate standards;
 - In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
 - We can provide product customization service, please contact our technicians directly for specific information;
 - Products are related to laws and regulations: see "Features" and "EMC";
 - The out case needs to be connected to PE () of system when the terminal equipment in operating;
 - The output voltage can be adjusted by the ADJ, clockwise to increase;
 - Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
 - The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com