


SPECIFICATION	CONNECTION	BIPOLAR
AMPS/PHASE		2.50
RESISTANCE/PHASE(Ohms)@25°C		2.10±10%
INDUCTANCE/PHASE(mH)@1KHz		8.20±20%
MINIMAL THRUST(N)@300 PPS		540.00
LEAD(mm)		2.54
LINEAR TRAVEL/STEP(mm)		0.0127
STEP ANGLE(°)		1.80
STEP ACCURACY(NON-ACCUM)		±5.00%
LEAD TYPE		AWG 22
TEMPERATURE RISE:MAX.80°C (MOTOR STANDSTILL;FOR 2PHASE ENERGIZED)		
AMBIENT TEMPERATURE -10°C-50°C[14°F-122°F]		
INSULATION RESISTANCE 100 Mohm (UNDER NORMAL TEMPERATURE AND HUMIDITY)		
INSULATION CLASS B 130°C[266°F]		
DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)		
AMBIENT HUMIDITY MAX.85%(NO CONDENSATION)		

TYPE OF CONNECTION (EXTERN)		MOTOR	
PIN NO	BIPOLAR	LEADS	WINDING
1	A -	RED	A
2	A1 -	RED/WHT	A1
3	B -	GRN/WHT	B
4	B1 -	GRN	B1

FULL STEP 2 PHASE-EX, WHEN FACING MOUNTING END (X)

STEP	A	B	A1	B1	CCW
1	+	+	-	-	↑
2	-	+	+	-	↑
3	-	-	+	+	↓
4	+	-	-	+	↓

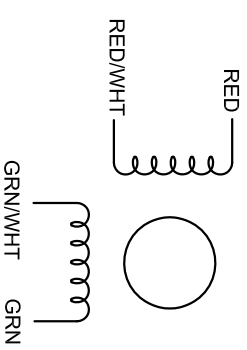

SCALE 1:1

APVD	10.19.2021
CHKD	
DRN	
SIGNATURE	DATE

STEPPER MOTOR
 23E26S2504GG-250RS
 (23LS26-25043-250E)