LOF550-20Bxx Series















FEATURES

- Universal 90 264VAC or 127 370VDC input voltage
- Compact size 5" x 3"
- Operating ambient temperature range: -40 $^\circ$ C to +70 $^\circ$ C
- Built-in active PFC function
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- 320W with air cooling, 550W with 25CFM
- 5VDC standby output, 12VDC fan supply
- PG signal and remote sensing function
- Safety according to medical certification, suitable for BF application
- The base plate with conformal coating
- 3 years warranty
- Operating altitude up to 5000m
- Safety according to IEC62368, GB4943, IEC/EN60335, IEC/EN61558

LOF550-20Bxx series is one of Mornsun's AC-DC miniaturize open frame power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-1, IEC/UL/EN62368-1, GB4943.1, EN60335-1, IEC/EN61558-1, IEC/EN/ES60601-1 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, etc.

Certification	Part No.*	Cooling Method	Output Power (W) *	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ. *	Capacitive Load (µF) Max.
	LOF550-20B12	Air cooling	320.4	12V/26.7A	11.4 -12.6	91	6000
III /ENI/IEC	LOF550-20B12	25CFM	499.2	12V/41.6A	11.4 - 12.0	91	0000
UL/EN/IEC	LOF550-20B15	Air cooling	319.5	15V/21.3A	14,25 -15,75	00	4000
	LOF000-20B10	25CFM	499.5	15V/33.3A	14.25 - 15.75	92	6000
	LOFEED DODIE	Air cooling	320.4	18V/17.8A			
	LOF550-20B18	25CFM	500.4	18V/27.8A	17.1.10.0	00.5	4000
	LOFFFO 00010	Air cooling	319.2	19V/16.8A	17.1-19.9	92.5	6000
	LOF550-20B19	25CFM	499.7	19V/26.3A			
LII /EN //EO	1.05550.00004	Air cooling	321.6	24V/13.4A	00.0.05.0	00	4000
UL/EN/IEC	LOF550-20B24	25CFM	549.6	24V/22.9A	22.8 -25.2	93	6000
	1.05550.00007	Air cooling	321.3	27V/11.9A	05 /5 00 05	00.5	4000
III /FNI	LOF550-20B27	25CFM	550.8	27V/20.4A	25.65 - 28.35	93.5	4000
UL/EN	LOFFEO OODO	Air cooling	320.4	36V/8.9A	240 270	0.4	2000
	LOF550-20B36	25CFM	550.8	36V/15.3A	34.2 - 37.8	94	3000
	1.05550.00040	Air cooling	321.6	48V/6.7A	45 / 50 4	0.4	0000
	LOF550-20B48	25CFM	550	48V/11.46A	45.6 - 50.4	94	2000
UL/EN/IEC	1.05550.0005.4	Air cooling	310.5	54V/5.75A	510 547	0.4	1500
	LOF550-20B54	25CFM	550.8	54V/10.2A	51.3 - 56.7	94	1500

Notes: 1.*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current; 2.*When measuring the full load efficiency, the fan should be connected to an external power supply. Fan loss is not included in the input power; 3.*LOF Products with shell is also available, named LOF550-20Bxx-C/CF;

AC/DC 550W Open Frame Power Supply LOF550-20Bxx Series



Input Specification	ns					
Item	Operating Condition	ns	Min.	Тур.	Max.	Unit
Innut Voltago Dango	AC input		90		264	VAC
Input Voltage Range	DC input		127		370	VDC
Input Frequency			47		63	Hz
1101	115VAC		-		6.5	
Input Current	230VAC				4.0	
1	115VAC	Caldahanh	-	50		Α
Inrush Current	230VAC	Cold start		80		
	115VAC	Full lawed	0.98			-
Power Factor	230VAC	Full load	0.95			-
Logicago Current	0/4/40 5011	Contact leakage current		<0.	.lmA	
Leakage Current	264VAC, 50Hz	Earth leakage current		<0.	.5mA	
Hot Plug				Unav	ailable	

Output Specification	s*						
Item	Operating Conditions			Min.	Тур.	Max.	Unit
	5.11	12\	//15V/18V/19V/24V/27V		±2		
Output Voltage Accuracy*	Full load	36\	V/48V/54V		±1		0/
Line Regulation	Rated load				±0.5		%
Load Regulation	0%-100% load			-	±1	-	
Ripple & Noise*	20MHz bandwidth (pe	ak-to-pe	ak value)	-		200	mV
Temperature Coefficient				-	±0.03	_	%/℃
Minimum Load				0		-	%
II. I. I. I T	115VAC input			10			
Hold-up Time	230VAC input			10			ms
0, 1, 5, 0, 1,	Room temperature, 23	0VAC	18V/19V/27V/36V	-	-	0.5	147
Stand-by Power Consumption	input (PS_ON Low pote	ential)	12V/15V/24V/48V/54V	-		0.6	W
	Recovery time <5s after short circuit disappear		18V/19V/27V/36V	Hic	cup, continu	ous, self-reco	over
Short Circuit Protection	Recovery time <10s after short circuit disappear		12V/15V/24V/48V/54V	•		nt current wo	
Over-current Protection				≥	105%lo, hicc	up, self-recov	ver
	12V			≤15.6\	v	•	
	15V			≤19.5\	V		
	18V			<00 A			
	19V			≤23.4\			
Over-voltage Protection	24V			≤31.2\	V	utput voltag power on fo	
	27V			≤35.1\		power or to	11600061
	36V			≤46.8\	V		
	48V			≤60.0\	V		
	54V			≤63.0\	V		
Over-temperature Protection						-temperature ne temperatu	
Fan Power*				Off	er output po	wer of 12V/0).5A
DS ON Input Signal*	Power on	PS_ON	high	2		5	V
PS_ON Input Signal*	Power off	PS_ON	how	0		0.5	v
PG Signal*	Power on	with 10	signal goes high ms to 500ms delay after r set up	10		500	ms
	Power off/Power fail	The TTL	signal goes low at	1	-	-	

MORNSUN®





		least 1ms before output below 90% of rated value				
	High level	High	2		6	V
	Low level	Low	0		0.6	V
Remote Sense*	When RS+ and RS needed, left RS+ o	- are connected to the system, with fu and RS- open	inction of remo	ote voltage o	compensatio	on, if not
5V Standby	5Vsb: The load co 120mVp-p(max.)	apacity is 0.6A without fan, the load c	apacity is 1A v	vith fan 25Cf	M; toleranc	e 2%, ripple:

Note: 1.*Output Voltage Accuracy: including setting error, line regulation, load regulation;

- 2.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor (Low ESR) and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information;
- 3.*For fan power connection method, please refer to 5, 6 in the external dimension drawing;
- 4.*For PS_ON, 5V standby connection method, please refer to CN6 in the external dimension drawing;
- 5.*For PG standby connection method, please refer to CN2 in the external dimension drawing;
- 6.*For all the above test items, please refer to our company standard "AC-DC Black Box Test Specification" for specific test specifications and methods;

Item		Operating Conditions		Min.	Тур.	Max.	Unit
	Input - output			4000			
Isolation Test	Input - 😩	Electric Strength Test for 1min. Leal	kaae current<5mA	2000			VAC
	output - 😩	,		1500			-
	Input - output	Environment temperature: 25 ± 5°C		100			
Insulation Resistance	Input - 🖶	Relative humidity: <95%RH, non-co		100			M Ω
Kesisiai ice	output - 😩	Testing voltage: 500VDC		100			
	Input - output			2 x MOPP			
Isolation level	Input - 😩			1 x MOPP			
	output - 🖶			1 x MOPP			
Operating Tem	perature			-40		+70	€
Storage Tempe	erature			-40		+85	
Storage Humic	lity	Non-condensing		10		95	%RH
Operating Hun	nidity	Non-condensing		20		90	/olt⊓
Switching Freq	uency						KHz
	OFCEM	Operating temperature derating	-40°C to +50°C	0			%/ ℃
	25CFM	Operating temperature detailing	+50°C to +70°C	2.5			/6/ C
		030) (/ 300) (/	+45°C to +50°C	4.0			
		230V/ 320W	+50°C to +60°C	6.0			
D	Air cooling		+30°C to +40°C	1.0			W/℃
Power Derating		115V/310W	+40°C to +50°C	6.0			
Derding			+50°C to +60°C	4.0			
		90VAC -115VAC		1.0			%/VAC
	Input voltage	115VAC - 264VAC		0			76) VAC
	derating	127VDC -160VDC		0.76			%/VDC
		160VDC - 370VDC		0			
		12V/15V/24V/48V		approved 8 EN60601-1(F	& EN/BS EN6: Report) r to IEC6236	EC60601-1 sa 2368-1, EN/B 8-1, ES60601-	S
		18V/19V		IEC/ES/EN60	0601-1, EN60		
Safety Standar	rd	27V/36V		EN62368-1,	EN/BS EN600 r to IEC6236	afety approvi 601-1(Report 8-1, GB4943.)
		54V		UL62368-1, I EN/BS EN62	EC60601-1 s 368-1 (Repor r to IEC6236	afety appro t) 8-1, GB4943.	

MORNSUN®






Safety Class		CLASS I
MTBF	MIL-HDBK-217F@25℃	>200,000 h

Mechanical Spe	ecifications experience of the second se
Case Material	Open Frame
Dimension	127.00mm x 76.20mm x 40.50mm
Weight	490g (Typ.)
Cooling Method*	Air cooling (310W/320W) / 25CFM (500W/550W)
Notes: *Please refer to the	product characteristic curve for cooling method and power derating.


Electromag	netic Compatibility (EMC)	*		
	CE	EN55032(CISPR32)/EN	55011(CISPR11) CLASS B	
Factorions	RE	EN55032(CISPR32)/EN	55011(CISPR11) CLASS B	
Emissions	Harmonic Current	IEC/EN61000-3-2	CLASS A and CLASS D	
	Flicker	IEC/EN61000-3-3		
	ESD	IEC/EN61000-4-2	Contact ±8KV/Air ±15KV	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
lana ana sana ita d	EFT	IEC/EN61000-4-4	±2KV	Perf. Criteria A
Immunity	Surge	IEC/EN61000-4-5	line to line ± 2 KV/line to ground ± 4 KV	Perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
	DIP IEC/EN61000-4-11 0%, 70%	DIP IEC/EN61000-4-11	0%, 70%	Perf. Criteria B


Note: *The power supply should be considered as a part of the components in the system. All EMC performance are been tested on a metal plate with a thickness of 1mm and a length of 360mm x 360mm. The power supply must be combined with the terminal equipment for electromagnetic compatibility confirmation.

Product Characteristic Curve

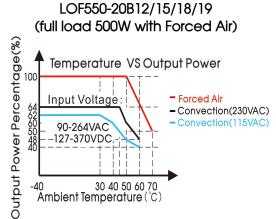

LOF550-20B24/27/36/48/54 (full load 550W with Forced Air)

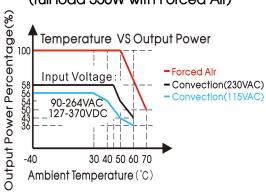





Note: With an AC input voltage between 90 - 115VAC and a DC input between 127 - 160VDC the output power must be derated as per the temperature derating curves

MORNSUN®

LOF550-20Bxx Series




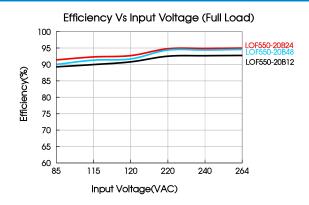

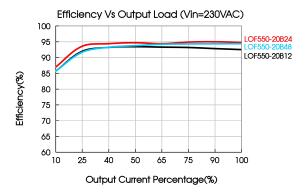

Dimensions and Recommended Layout

LOF550-20Bxx

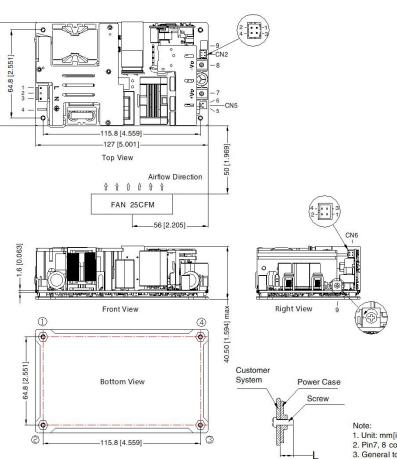

Pir	n-Out	Customer Connector
Pin	Mark	Harrison ICT VIID O an application
1	AC(L)	Housing: JST VHR-3 or equivalent Contact: JST SVH-21T-P1.1
2	NC	or equivalent or
3	AC(N)	PJA-106(Momsun Accessory)
4	(a)	Contact: JST SPS-21T-250
5	FAN+	CN5: Fan power output port Housing: TKP 2502 or Molex0511910200 or equivalent
6	FAN-	Contact: TKP 54T or Molex0508028100 or equivalent
7	+Vo	
8	-Vo	
9	ADJ Output adjustable resistor	

THIRD ANGLE PROJECTION

_	-1	5VDC Standby output(1-2)
Pin-	-Out	Customer Connector
Pin	Mark	NUMBER OF A STATE OF THE STATE
1	+5V	Housing: TKP DH2–4P or HRS DF11–4DS–2C or equivalent
2	GND	Contact: TKP DHT or HRS
3	PS-ON	DF11-22SC or equivalent
4	GND	
2 -	-1 CN2:	Remote sensing signal input port(1-2)
4 -	-1 CN2: -3	Remote sensing signal input port(1-2 PG signal(3-4) Customer Connector
4 -	-3	PG signal(3-4) Customer Connector
4 - Pin-	-3 -Out	PG signal(3-4)
4 - Pin-	Out Mark	PG signal(3-4) Customer Connector Housing: TKP DH2-4P or HRS
Pin-Pin-1	Out Mark RS-	PG signal(3-4) Customer Connector Housing: TKP DH2-4P or HRS DF11-4DS-2C or equivalent

- 1. Unit: mm[inch]
- 2. Pin7, 8 connector tightening torque: M4, 1.2N · m(max)
- 3. General tolerances: ± 1.00[± 0.039]
- 4. The layout of the device is for reference only, please refer to the actual product 5. It is recommended 10mm distance between the PCB and other components for
- 6. Class I system 1 2 4 positions must be connected to the earth ()

Position

1 - 4

Screw Spec

МЗ


L(Recommend)

2.5mm

0.4N · m

LOF550-20Bxx Series



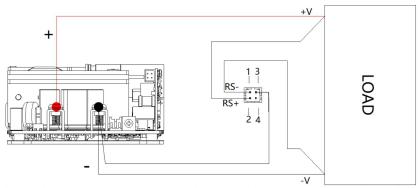

Remote sensing function wiring diagram

Note:

- 1. RS- and RS+ cannot be shorted or reversed, otherwise the power module will be damaged;
- 2. The remote compensation function can compensate the voltage drop on the output cable, which includes the sum of the cable drop connected to the output positive terminal and the output negative terminal;
- 3. If you need to use remote compensation function, the signal pin needs to be connected with the load and with a twisted pair.
- 4. The PJA-XXX series is the accessories of products, quotation is available.

Note:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220181;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 3. All index testing methods in this datasheet are based on our company corporate standards;
- 4. In order to improve the efficiency, there will be audible noise generated when work at light load, but it does not affect product performance and reliability;
- 5. We can provide product customization service, please contact our technicians directly for specific information;
- 6. Products are related to laws and regulations: see "Features" and "EMC";
- 7. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing."/"ATTENTION: Double pôle/fusible sur le neutre. Débrancher lalimentation avant lentretien;
- 8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions;
- The surface of product should keep a safe distance from the customer system (recommended ≥3mm), if not, please consult Mornsun FAE.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com

MORNSUN®