AC/DC 100W Enclosed Switching Power Supply LM100-10Cxx, LM100-10Cxx-Q Series





FEATURES

- Universal 90 264VAC or 120 370VDC Input voltage
- Operating ambient temperature range: -30°C to +70°C
- High efficiency, high reliability and long life
- LED indicator for power on
- Output short circuit, over-current, over-voltage protection
- High I/O isolation test voltage up to 3000VAC
- Withstand 5G vibration test
- Operating altitude up to 5000m



This LM100-10Cxx series of power converter design features 3 output versions, which can independently supply 3 different loads in the system. The products can be used in harsh working environments with an ambient temperature range from -30 $^{\circ}$ C to +70 $^{\circ}$ C, without the need of a fan for further heat dissipation. In addition, the converters EMC immunity performance meets the requirements of IEC61000 standard and meet emission standard CISPR32/EN55032, class B without any external components, thus providing excellent EMC protection. The products also meet IEC/EN/UL62368, EN60335, GB4943 safety standards. The converters integrate a variety of protection features and offer a high-performance to low-cost ratio providing the best power solution for a variety of industries such as industrial control equipment, instrumentation and smart home and building equipment application.

Selection	Guide											
Certification Part No.*	Part No.*	Output	Rated Output Voltage and Current(Vo/Io)		Working Current Range*		Efficiency at 230VAC	Max. Capad Load(µF				
	Power	Vo1/lo1	Vo2/lo2	Vo3/lo3	lo1	lo2	lo3	(%) Typ.	Vo1	Vo2	Vo3	
FNI	LM100-10C 051212-35	94W	+5V/8.0A	+12V/3.5A	-12V/1.0A	0.8-10.0A	0.35-4.0A	0.1-1.5A	84	8000	3500	1000
EN UKCA BIS	LM100-10C 051515-30	95W	+5V/7.0A	+15V/3.0A	-15V/1.0A	0.7-10.0A	0.3-4.0A	0.1-1.5A	85	7000	3000	1000
DIS	LM100-10C 052412-20	96W	+5V/6.0A	+24V/2.0A	+12V/1.5A	0.6-8.0A	0.2-2.5A	0.15-2.0A	85	6000	2000	1500

Note: 1.*Working current range: If any one of the 3 outputs arrive at the maximum current, another output with 50% rated load, the total output power cannot exceed the rated power and working time < 3s, the output voltage accuracy of vo2/vo3 is $\pm 10.0\%$; 2.*Use suffix "Q" for conformal coating.

Input Specification	ons					
Item	Operating Conditions		Min.	Тур.	Max.	Unit
Innuit Voltago Dango	AC input				264	VAC
Input Voltage Range	DC input	DC input			370	VDC
Input Frequency					63	Hz
	115VAC			2.5		
Input Current	230VAC	230VAC			1.5	
	115VAC	Cald show		30		Α
Inrush Current	230VAC	Cold start		50	-	
Leakage Current	240VAC		<2.	0mA		
Hot Plug			Unavailable			

Output Specification	ns						
Item	Operating Condition	Operating Conditions				Max.	Unit
Output Voltage Accuracy		Vo1	Vo1		±2	-	
		Vo2	LM100-10C051212-35		±5.0	-	
			LM100-10C051515-30	-7.0	-	+3.0	
	Full load range		LM100-10C052412-20		±5.0	-	%
		Vo3	LM100-10C051212-35		±6.0	-	
			LM100-10C051515-30		±6.0	-	
			LM100-10C052412-20		±6.0	_	
Line Regulation	Full load	Vo1			±0.5		%

MORNSUN®

AC/DC 100W Enclosed Switching Power Supply LM100-10Cxx, LM100-10Cxx-Q Series



			LM100-10C051212-35		±1.0		
		Vo2	LM100-10C051515-30		±1.0		
			LM100-10C052412-20		±1.0		
			LM100-10C051212-35		±1.0		
		Vo3	LM100-10C051515-30		±1.0		
			LM100-10C052412-20		±1.0	-	
		Vo1			±1.0	-	
			LM100-10C051212-35		±3.0	±5.0	
Load Regulation		Vo2	LM100-10C051515-30		±3.0	±5.0	
	10% - 100% load		LM100-10C052412-20		±3.0	±5.0	
	(Balanced load)		LM100-10C051212-35		±6.0		
		Vo3	LM100-10C051515-30		±6.0	-	-
			LM100-10C052412-20		±6.0	-	-
		Vo1			80	-	
	20MHz bandwidth (peak-peak value)		LM100-10C051212-35		120	-	
		Vo2	LM100-10C051515-30		120	-	-
Ripple & Noise*			LM100-10C052412-20		150	-	mV
			LM100-10C051212-35		120	-	
		Vo3	LM100-10C051515-30		120	-	
			LM100-10C052412-20		120	-	-
Temperature Coefficient	Vo1		'		±0.03		%/ ℃
Voltage Adjustable Range(Vo1)*	Rated input voltage			4.75	-	5.50	VDC
Switching Delay Time	Rated input voltage				-	2.0	s
	115VAC			5			
Hold-up Time	230VAC			30			ms
Min. Load				Refe	r to the work	ing current	range
Short Circuit Protection	Recovery time <5s after the short circuit disappear			Hico	cup, continu	ous, self-rec	cover
Over-current Protection	3 outputs with balanced load				≥110%lo,s	elf-recover	
Over-voltage Protection (Vo1)		o odipate mini balantood toda			5.75VDC≤Vo (Output volt re-power on	age turn of	f,

Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information;
2. *When Vo1 working in the adjustable range, the output power please refer to power derating curve and should not be exceed the rated output power.

Genera	l Specification	o ns					
Item		Operating Conditions			Тур.	Max.	Unit
Input - Output			3000				
Isolation Voltage	Input - 🖶	Electric Strength Test for 1min., leaka	ge current <10mA	2000	-		VAC
	Output - 😩		500				
	Input - Output	Environment temperature: 25±5°C,	100				
Insulation	Input - 😩	Relative humidity: <95%RH, non-con-	densing	100			M Ω
Resistance Output - (1)		Testing voltage: 500VDC	100	-			
Operating Temperature				-30	-	+70	°C
Storage Temperature			-40	-	+85		
Operating H	lumidity	Non-condension	20	-	90	%RH	
Storage Hun	nidity	Non-condensing		10	-		95
				0.8	-		%/VAC
Power Derating		Input voltage derating	115VAC - 264VAC	0			
			120VDC - 160VDC	0.5			%/VDC
			160VDC - 370VDC	0			
		Operating temperature derating	-30°C to +40°C	0			%/℃

MORNSUN®

AC/DC 100W Enclosed Switching Power Supply MORNSUN® LM100-10Cxx, LM100-10Cxx-Q Series





		+40 ℃ to +70℃	2.0	_		
Safety Standard			EN62368-1, IS13252 (Part1) safety approved & BS EN 62368-1(Report) Design refer to UL/IEC62368-1, EN60335-1, GB4943.1			•
Safety Class CLASS I						
MTBF	MIL-HDBK-217F@25℃		>300,000 l	n		

Physical Specifications					
Case Material	Metal (AL1100, SGCC)				
Dimension	159.00 x 97.00 x 30.00 mm				
Weight	435g (Typ.)				
Cooling Method	Free air convection				

EMC Specifications							
	CE	CISPR32/EN55032	CLASS B				
Emissions	RE	CISPR32/EN55032	CLASS B				
	Harmonic current	IEC/EN61000-3-2	CLASS A				
	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A			
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A			
	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria A			
Immunity	Surge	IEC/EN61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria A			
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A			
	Voltage dips, short interruptions and voltage variations	IEC/EN61000-4-11	0%,70%	perf. Criteria B			


Product Characteristic Curve






Note: 1. With an AC input voltage between 90 -115VAC and a DC input between 120 -160VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

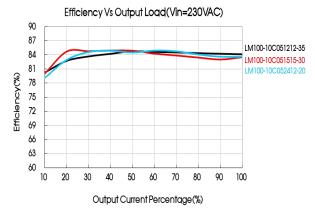

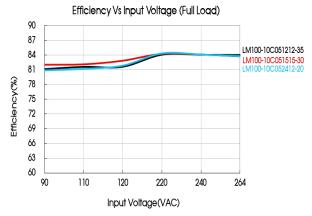


MORNSUN®

AC/DC 100W Enclosed Switching Power Supply MORNSUN® LM100-10Cxx, LM100-10Cxx-Q Series



Dimensions and Recommended Layout

LM100-10Cxx, LM100-10Cxx-Q Series

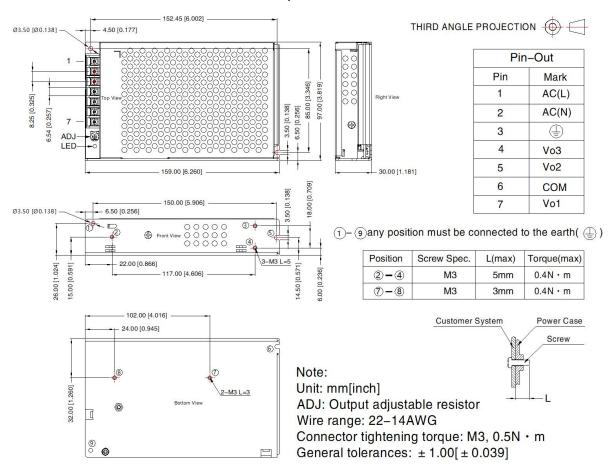

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220064; 1.
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards; 3.
- 4. In order to improve the efficiency, there will be audible noise generated when work at light load, but it does not affect product performance and reliability;
- 5. We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC"; 6.
- The out case needs to be connected to PE $(\stackrel{\square}{+})$ of system when the terminal equipment in operating; 7.
- CAUTION: Double pole, neutral fusing. Disconnect mains before servicing,"/"ATTENTION: Double pôle/fusible sur le neutre. Débrancher 8. lalimentation avant lentretien;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by 9. qualified units;
- 10. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China TTel: 86-20-38601850 Fax: 86-20-38601272 E-mail:info@mornsun.cn www.mornsun-power.com

MORNSUN®