


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	LDJ	12.17.2025

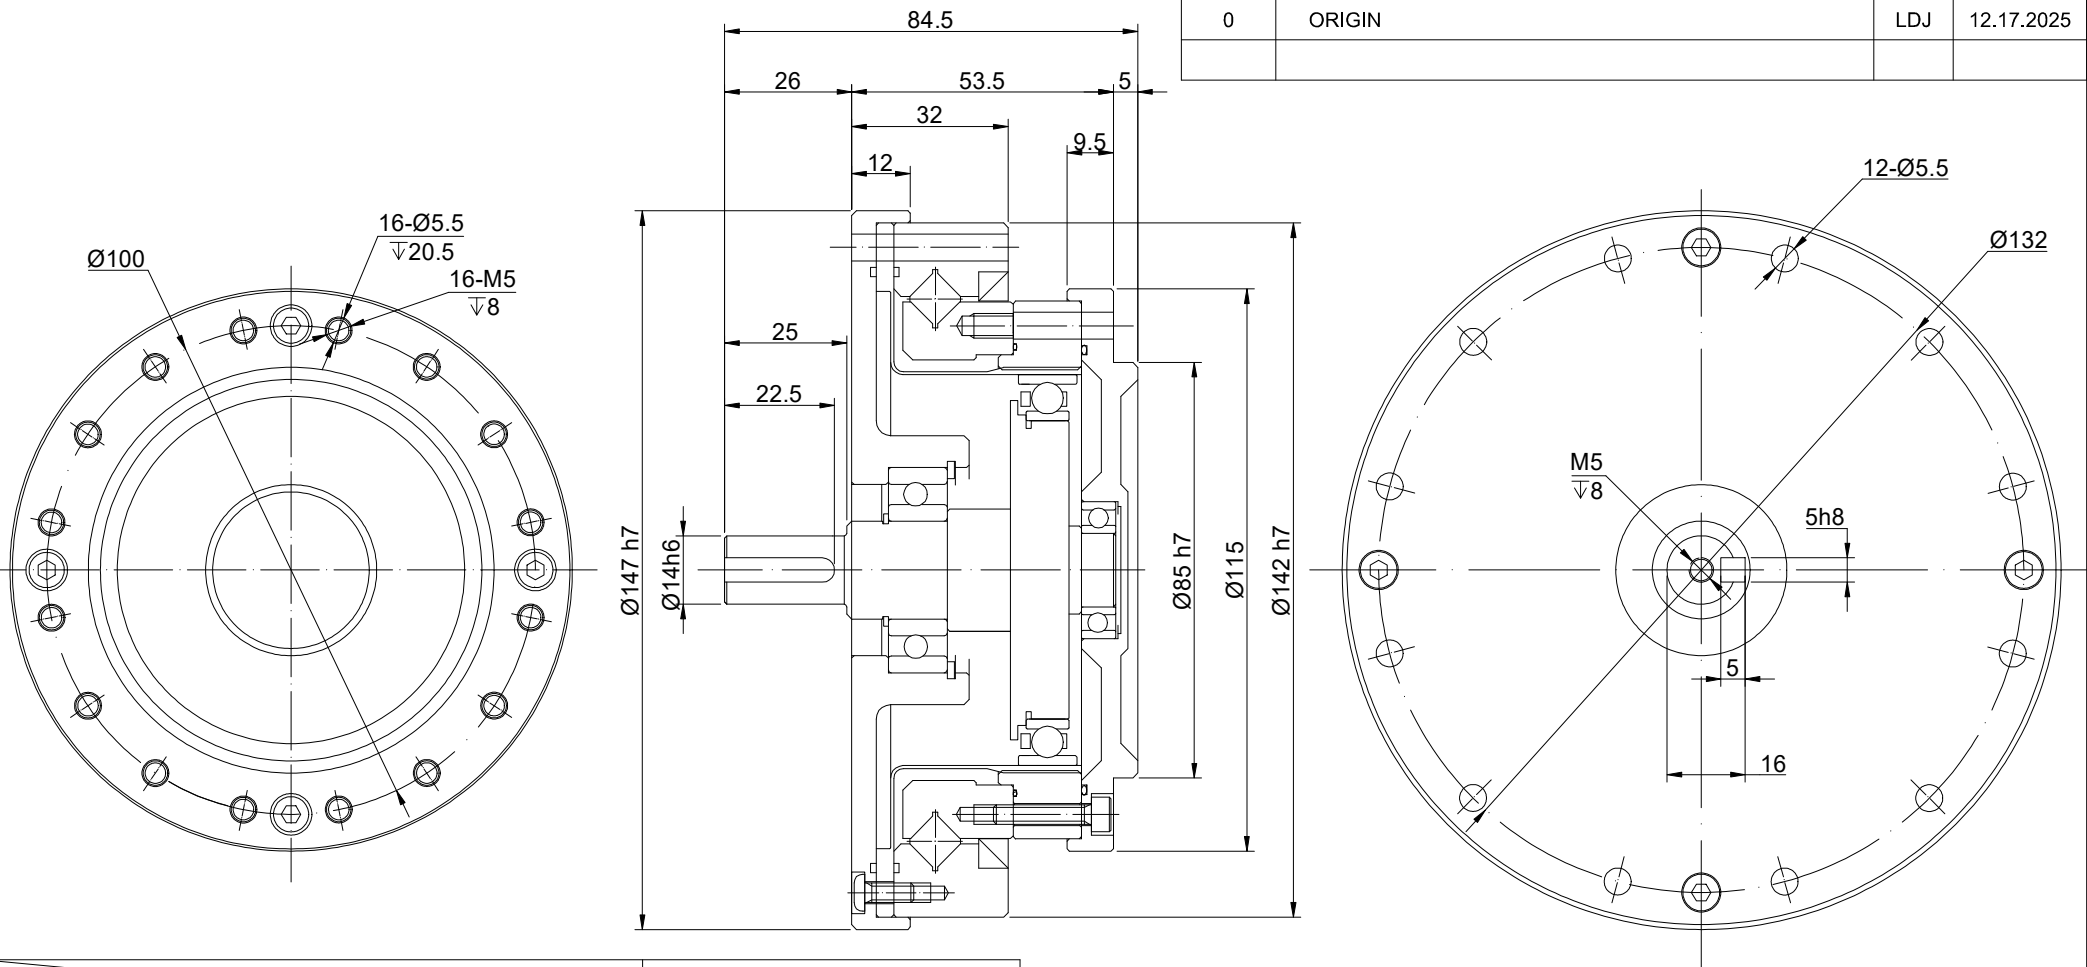

SPECIFICATION	CONNECTION	VALUE
GEAR RATIO		100
BACKLASH@NO-LOAD(arcsec)		$\leq 20$
RATED TORQUE(INPUT SPEED 2000RPM)(Nm)[lb-in]		178.00[1575.43]
MOMENT PERMISSIBLE TORQUE(Nm)[lb-in]		841.00[7443.48]
PEAK START-STOP TORQUE(Nm)[lb-in]		433.00[3832.37]
MAXIMUM INPUT SPEED ALLOWED(RPM)		4800
AVERAGE INPUT SPEED ALLOWED(RPM)		3500
WEIGHT(kg)		4.00
LIFE(h)		15000
AMBIENT TEMPERATURE		0°C~40°C[32°F~104°F]

DIMENSIONS ARE IN MILLIMETERS.  
TOLERANCES AS BELOW:  
DECIMALS ANGLES  
X  $\pm 0.5$   $\pm 2^\circ$   
X.X  $\pm 0.25$   
X.XX  $\pm 0.13$

THIRD ANGLE PROJECTION		
SIGNATURE		DATE
DRN	LDJ	12.23.2025
APVD	ZPJ	12.23.2025

<b>STEPPERONLINE®</b>									
HARMONIC REDUCER									
HHT-32-100-IV-D14									
REV.	0	SCALE	2:3	DWG NO.	A3362				