


SPECIFICATION	CONNECTION	BIPOLAR
AMPS/PHASE		0.24
RESISTANCE/PHASE(Ohms)@25°C		20.40±10%
MINIMAL THRUST(N)@300 PPS		10.00
LEAD(mm)		4.00
LINEAR TRAVEL/STEP(mm)		0.02
STEP ANGLE(°)		1.80
STEP ACCURACY(NON-ACCUM)		±5.00%
LEAD TYPE		AWG 26
TEMPERATURE RISE:MAX.80°C (MOTOR STANDSTILL;FOR 2PHASE ENERGIZED)		
AMBIENT TEMPERATURE -10°C~50°C[14°F~122°F]		
INSULATION RESISTANCE 20 Mohm (UNDER NORMAL TEMPERATURE AND HUMIDITY)		
INSULATION CLASS B 130°C[266°F]		
DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS AND THE MOTOR CASE)		
AMBIENT HUMIDITY MAX.85%(NO CONDENSATION)		

TYPE OF CONNECTION (EXTERN)		MOTOR	
PIN NO	BIPOLAR	LEADS	WINDING
1	A —	RED	A
2	A\ —	RED/WHT	A\
3	B —	GRN	B
4	B\ —	GRN/WHT	B\

FULL STEP 2 PHASE-Ex. ,
WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\		CCW
1	+		-		↓	↑
2		-		+		
3	-		+		↑	↓
4		+		-		

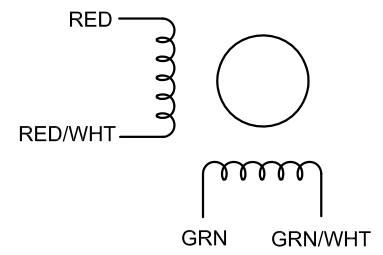

APVD		10.19.2021
CHKD		
SCALE	1.5:1	DRN
SIGNATURE		DATE

STEPPER MOTOR

8N11S0244DC-150RS
(8LS11-0244AD-150N)